

Characteristics:

Compact Size, High starting torque, Advanced EMC Suppression

Specifications:

Dimensions :	30 x 30 x 65 mm
Shaft Diameter :	Ø 4.0
Input Voltage :	14 V DC
No Load Speed *:	15300 rpm
No Load Current*:	2.20 A
Stall Torque* :	0.4 Nm
Maximum Output Power:	184 W
Maximum Efficiency:	67 %
Weight:	220 g
Operation Temperature:	-40 to 85 °C
Storage Temperature:	-40 to 110 °C

* Typical




Performance:

	No Load	Stall	Max Efficiency	Max Power
Current (A)	2.2	59	8.2	30
Efficiency (%)	-	-	67	41
Output Power (W)			74	184
Speed (rpm)	15300	-	13375	7616
Torque (Nm)	-	0.4	0.05	0.22

Application Examples:

Seatbelt Pretensioner

Drawing:

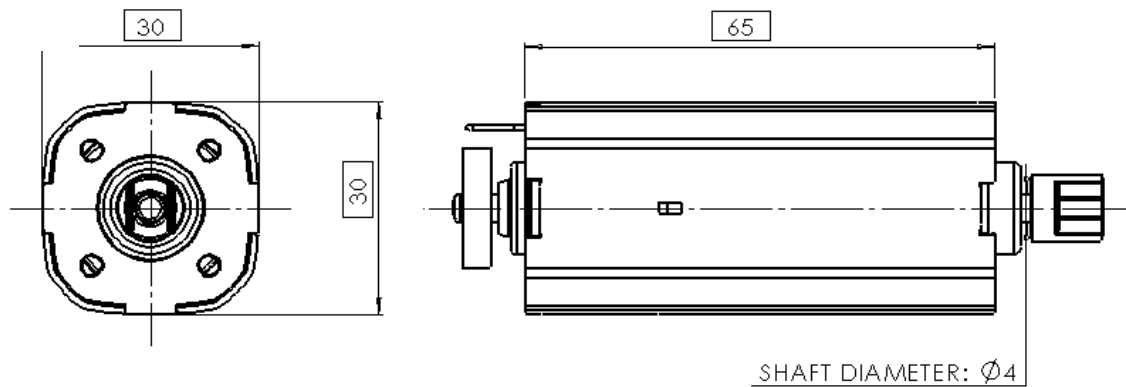

Unit in mm

Performance Curve:

