

CFM-L490

The CFM-L490 product line is custom designed to match the different airflow needs of small size engine power train with reduced available space.

The system is optimized for power density, package and efficiency.


It is extensively tested for the severe engine bay working condition and its reliability is proved by millions of applications world-wide.



Technology Leadership

- Highest power density
- Compact and slim design
- Low weight for fuel economy and reduced emissions
- Low noise and vibration

Performance Range

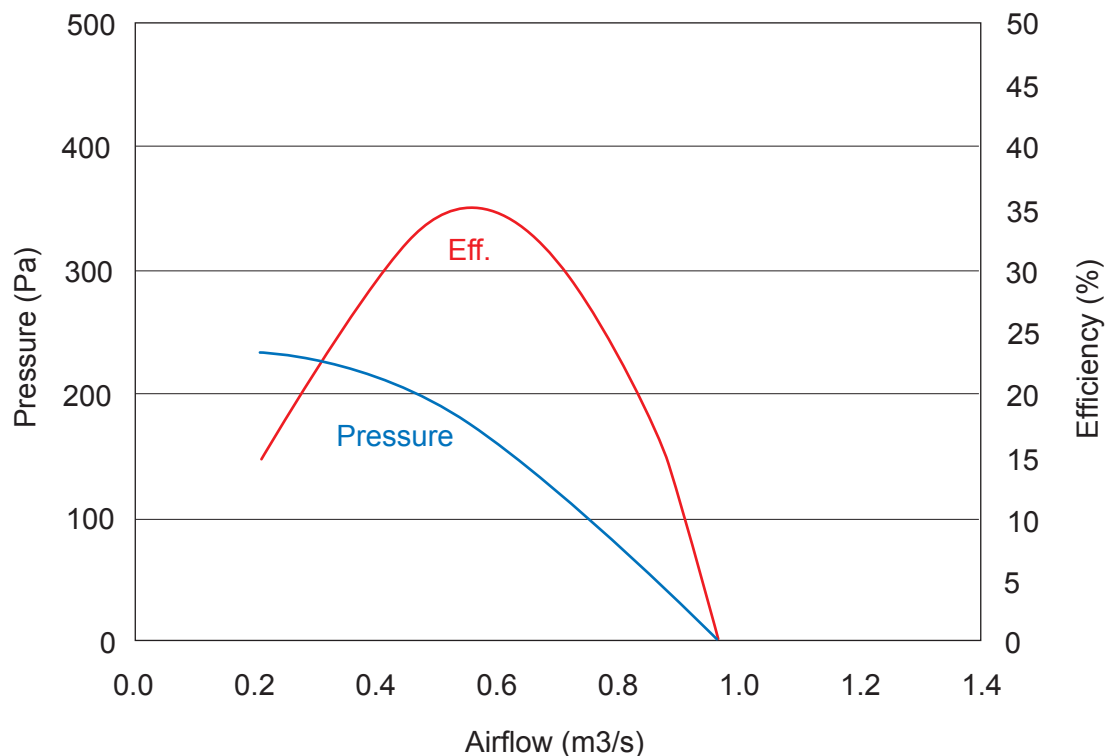

CFM-L490

Specification

■ Airflow power	: 90 W (*)
■ Axial length	: 68 mm (*)
■ Weight	: 2.86 kg (*)
■ Efficiency	: 32 % (*)
■ Fan Diameter	: 380 mm (*)
■ Supply	: 9 to 16 V
■ Temperature	: - 40°C to + 110°C (peak 125°C)
■ Absorbed power	: 280 W
■ Life	: 2,000 hours (**)
■ EMC	: according to CISPR 25
■ Compliance	: ELV 2000/53/CE

(*) GATE cooling fans are designed to meet customer requirements on airflow power, axial length, weight and efficiency.

(**) Life depends on customer mission profile

Customized to your needs

- Fan is designed to meet the maximum efficiency and minimum noise
- Shroud can interface with any vehicle radiators and auxiliary components
- Motor is customized from a wide portfolio of 4 poles brushed DC technologies
- Stall protection
- Integrated connector and flying leads
- Closed and open motor frame design
- Speed regulation available with resistor, switched brushes and with electronic PWM controller
- Speed flaps