

Characteristics:

High Power, High Efficiency, Compact size, Stable rated speed, Low noise


Specifications:

Dimensions	: Ø 44.7 X 75.6 mm
Shaft Diameter	: Ø 6.351 mm
Input Voltage	: 220.0 V DC
Rectified	: Rectified
No Load Speed	: 15639 rpm
Maximum Efficiency	: 60%
Torque at Maximum Efficiency	: 98.93 mNm
Speed at Maximum Efficiency	: 11385 rpm
Weight	: 436 g
Operating Temperature Range	: -10 to 55 °C
Storage Temperature Range	: -20 to 80 °C
Electrical Connection	: Terminal


**Performance Data:**

	No Load	Stall	Maximum Efficiency	Maximum Power
Current (A)	0.22	-	1.02	-
Efficiency (%)	-	-	60	-
Output Power (W)	-	-	120.04	-
Speed (rpm)	15639	-	11385	-
Torque (mNm)	-	-	98.93	-

Outline Drawing:

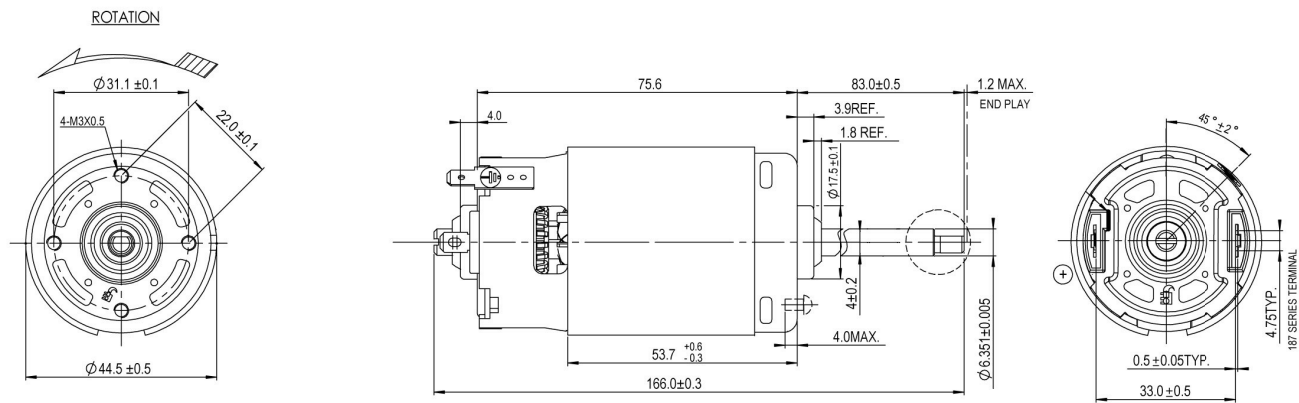

Performance Curves:

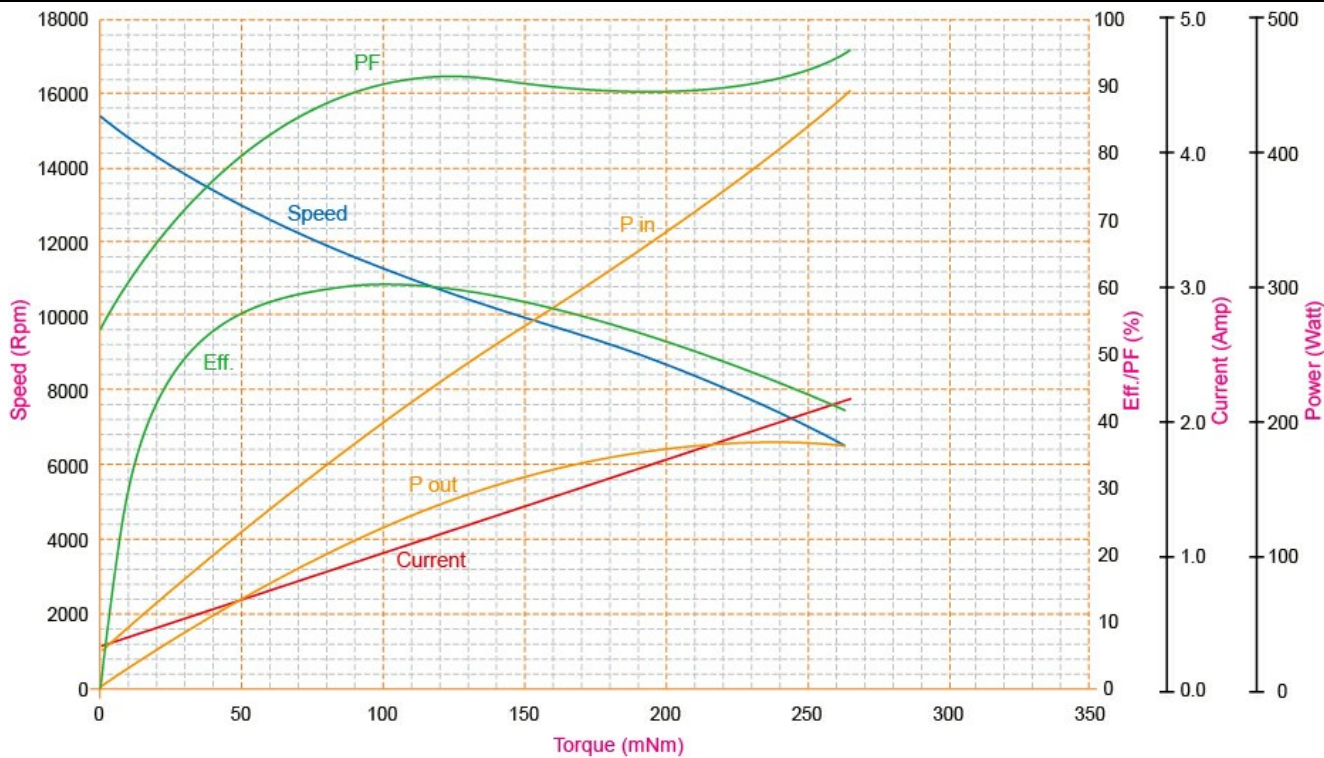

Units in Metric