

Characteristics:

High Power, High Torque, High Efficiency

Specifications:



Dimensions	: Ø 1.7 X 2.6 in
Shaft Diameter	: Ø 0.197 in
Input Voltage	: 100.0 V DC
Rectified	: Rectified
No Load Speed	: 15858 rpm
Maximum Efficiency	: 58%
Speed at Maximum Efficiency	: 10787 rpm
Life (Typical)	: 50 hr
Life Test Condition	: 1 min ON / 5 min OFF
Weight	: 10 oz
Operating Temperature Range	: 14 to 122 °F
Storage Temperature Range	: -4 to 185 °F
Electrical Connection	: Terminal

**Performance Data:**

	No Load	Stall	Maximum Efficiency	Maximum Power
Current (A)	0.27	-	1.41	-
Efficiency (%)	-	-	58	-
Output Power (hp)	-	-	0.10	-
Speed (rpm)	15858	-	10787	-
Torque (Lb.in)	-	-	0.59	-

Application Examples:

Grinders

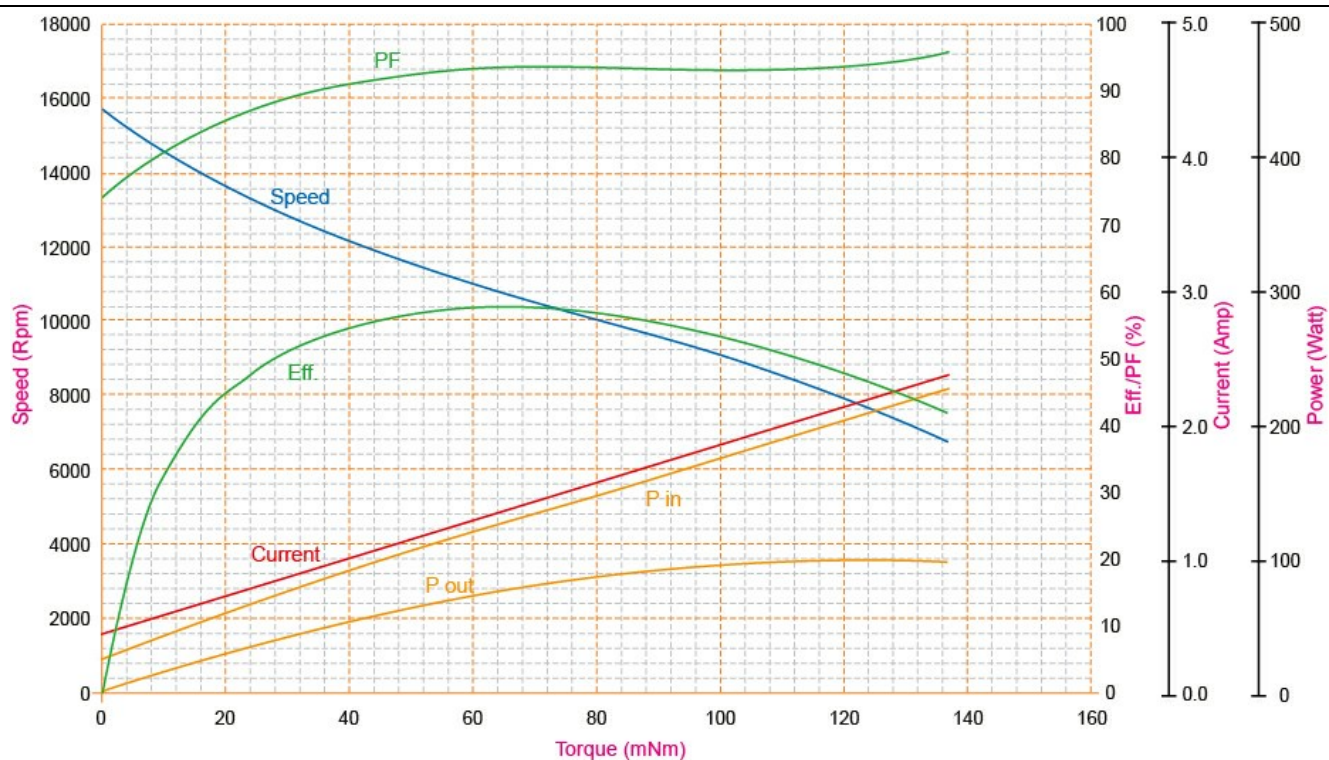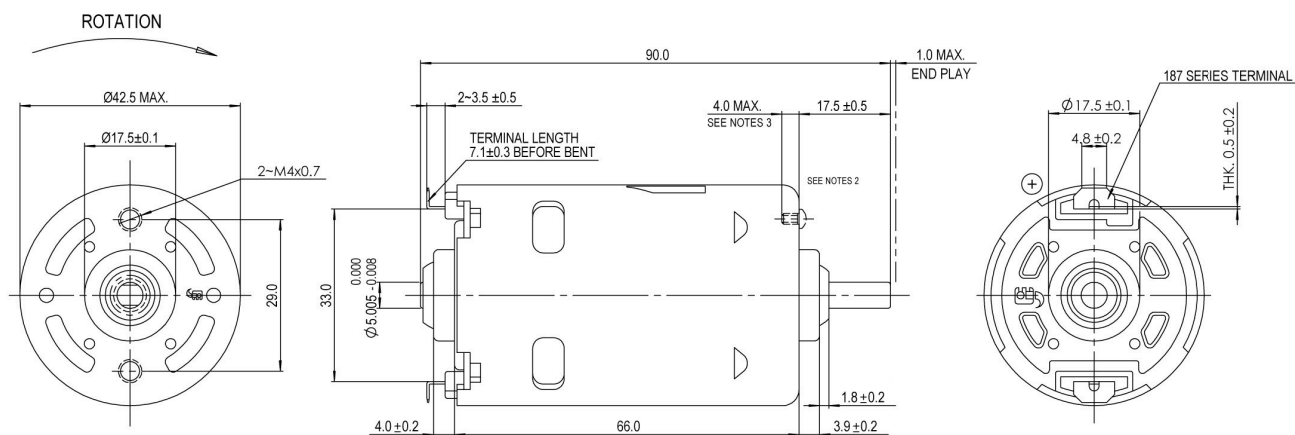

Units in Metric