

Characteristics:

Compact, High Reliability

Specifications:

Dimensions	: Ø 1.7 X 2.6 in
Shaft Diameter	: Ø 0.197 in
Input Voltage	: 230.0 V DC
Rectified	: Rectified
No Load Speed	: 13324 rpm
Maximum Efficiency	: 57%
Speed at Maximum Efficiency	: 9577 rpm
Operating Temperature Range	: 14 to 122 °F
Storage Temperature Range	: -4 to 176 °F
Electrical Connection	: Terminal




Performance Data:

	No Load	Stall	Maximum Efficiency	Maximum Power
Current (A)	0.11	-	0.45	-
Efficiency (%)	-	-	57	-
Output Power (hp)	-	-	0.07	-
Speed (rpm)	13324	-	9577	-
Torque (Lb.in)	-	-	0.47	-


Application Examples:

Rotary Sanders

Outline Drawing:

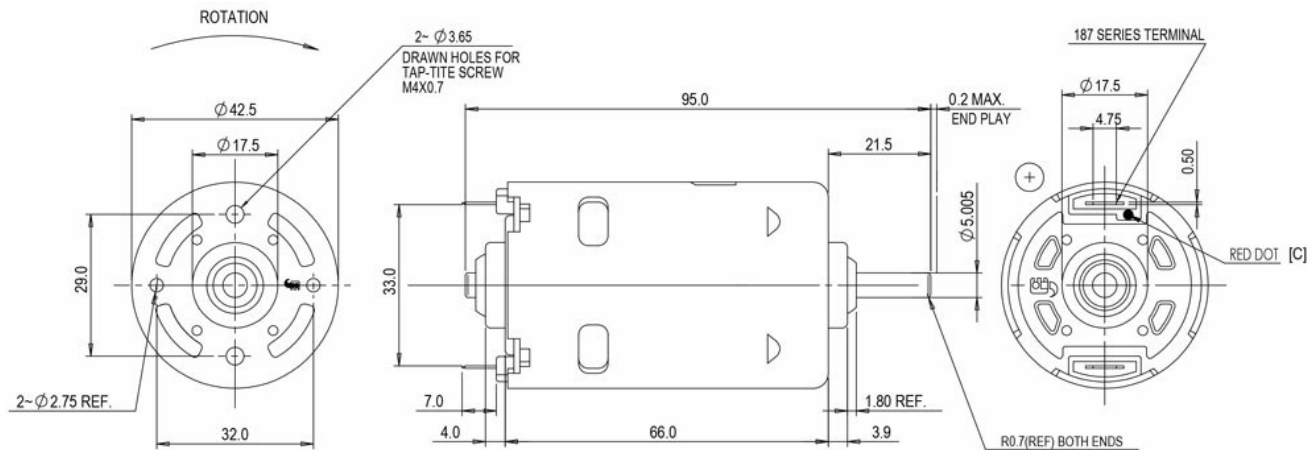

Performance Curves:

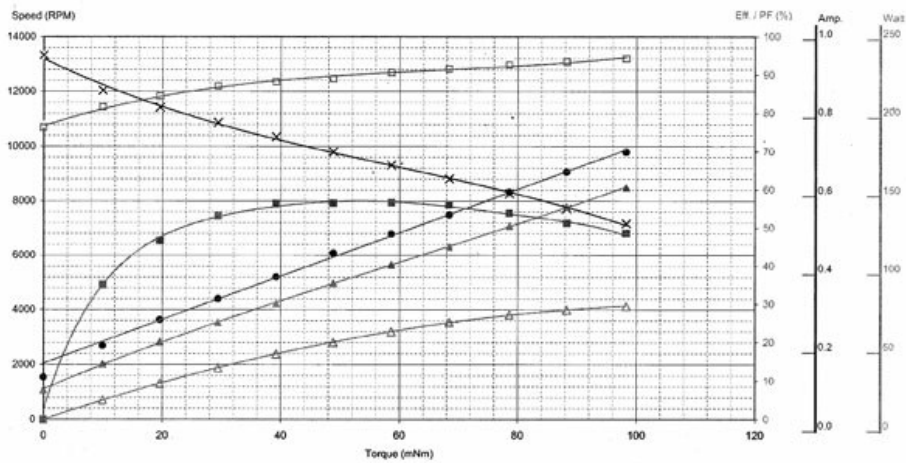

Units in Metric