

## Characteristics:

---

Compact, High Reliability

## Specifications:

---

Dimensions	: Ø 42.5 X 66.0 mm
Shaft Diameter	: Ø 5.000 mm
Input Voltage	: 230.0 V DC
Rectified	: Rectified
No Load Speed	: 13324 rpm
Maximum Efficiency	: 57%
Torque at Maximum Efficiency	: 52.61 mNm
Speed at Maximum Efficiency	: 9577 rpm
Operating Temperature Range	: -10 to 50 °C
Storage Temperature Range	: -20 to 80 °C
Electrical Connection	: Terminal



## Performance Data:

---


	No Load	Stall	Maximum Efficiency	Maximum Power
Current (A)	0.11	-	0.45	-
Efficiency (%)	-	-	57	-
Output Power (W)	-	-	53.06	-
Speed (rpm)	13324	-	9577	-
Torque (mNm)	-	-	52.61	-

## Application Examples:


---

Rotary Sanders

Outline Drawing:

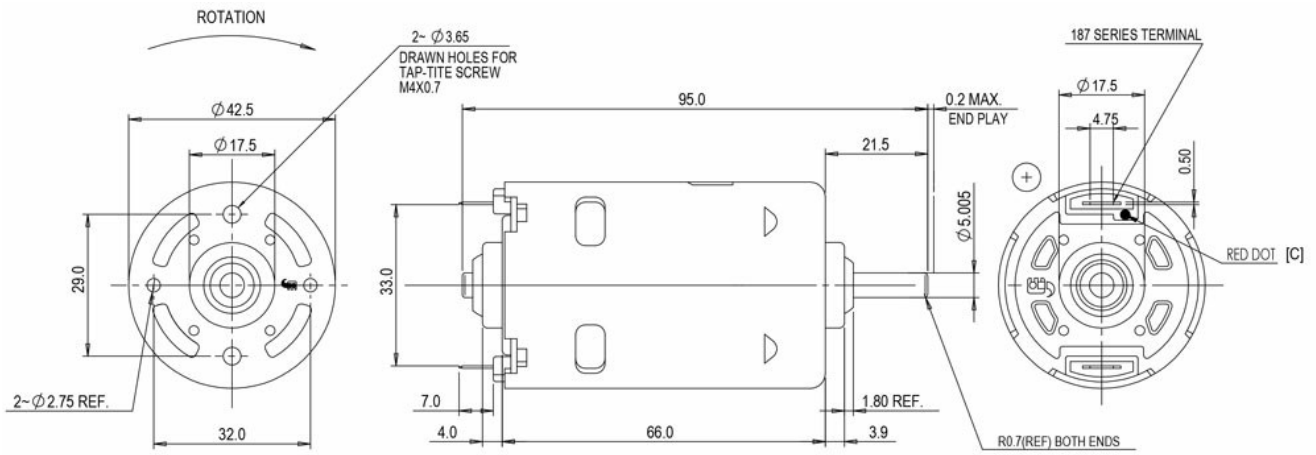

Performance Curves:

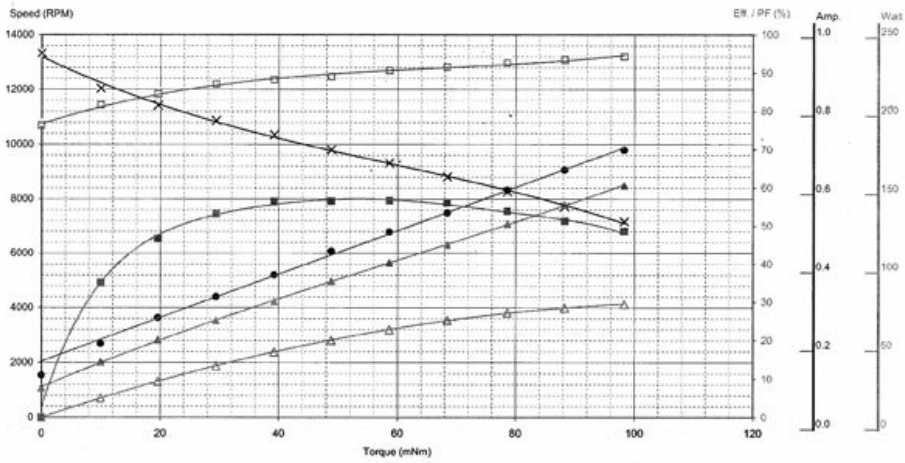

Units in Metric