

Characteristics:

High Power, High Efficiency

Specifications:

Dimensions	: Ø 44.7 X 75.6 mm
Shaft Diameter	: Ø 5.000 mm
Input Voltage	: 230.0 V DC
Rectified	: Rectified
No Load Speed	: 11701 rpm
Maximum Efficiency	: 65%
Torque at Maximum Efficiency	: 97.47 mNm
Speed at Maximum Efficiency	: 8849 rpm
Other Features	: Plate rating power 500Wi for 5-10 seconds
Weight	: 420 g
Operating Temperature Range	: -10 to 55 °C
Storage Temperature Range	: -20 to 80 °C
Electrical Connection	: Terminal


**Performance Data:**

	No Load	Stall	Maximum Efficiency	Maximum Power
Current (A)	0.13	-	0.69	-
Efficiency (%)	-	-	65	-
Output Power (W)	-	-	90.40	-
Speed (rpm)	11701	-	8849	-
Torque (mNm)	-	-	97.47	-


Application Examples:

Hand Blenders

Outline Drawing:

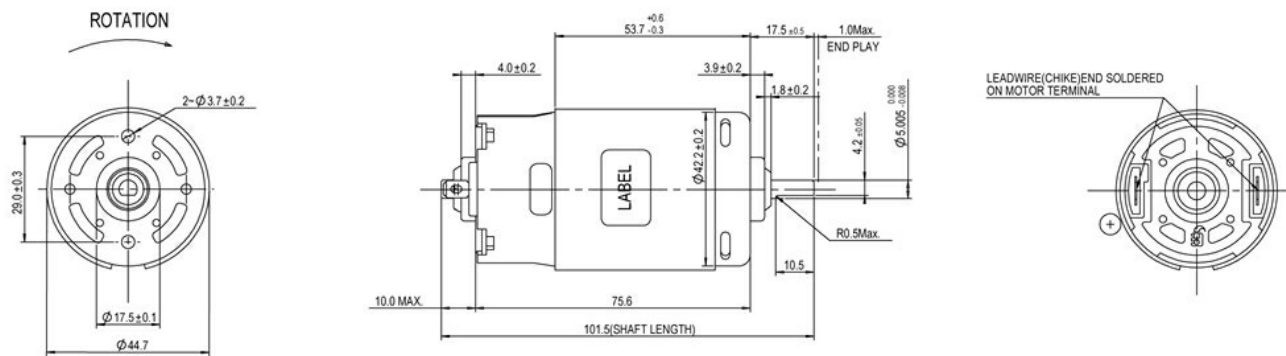

Performance Curves:

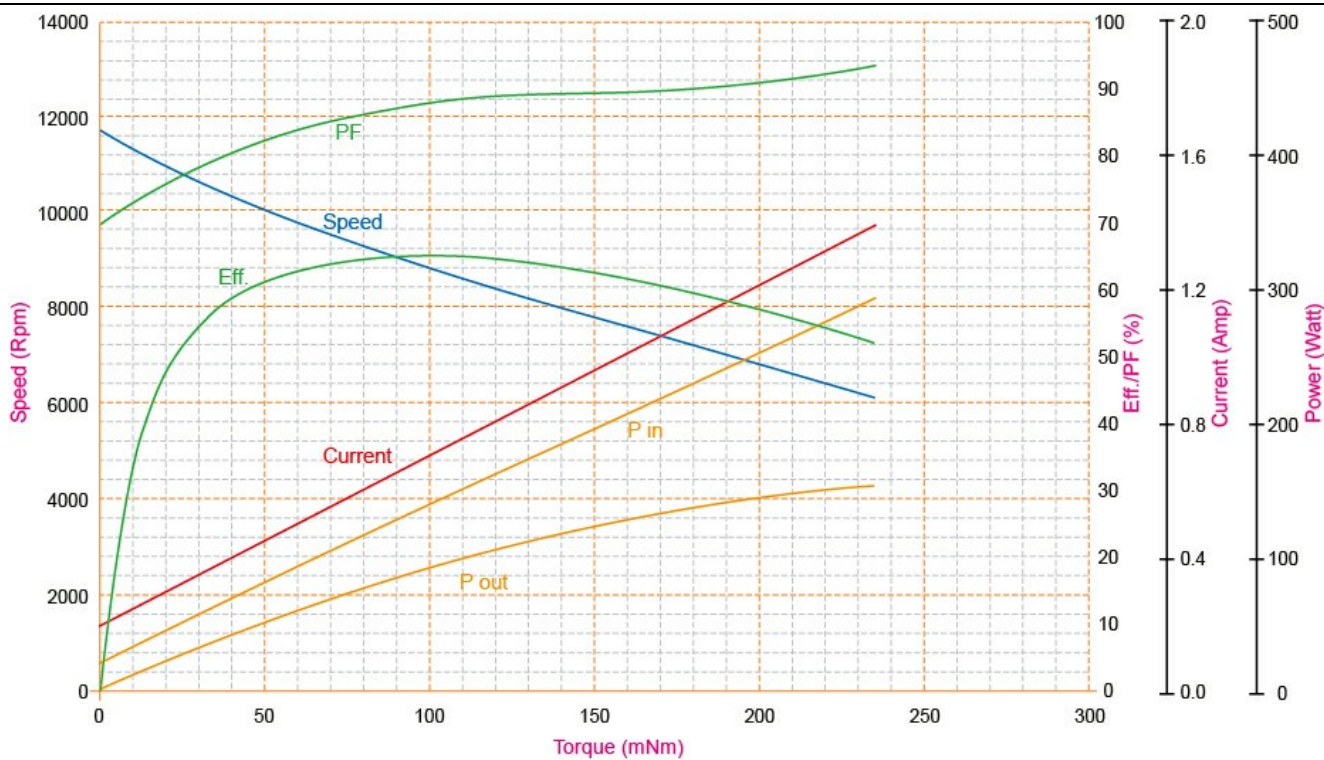

Units in Metric