

Characteristics:

Compact, High Reliability

Specifications:

Dimensions	: Ø 38.5 X 32.0 X 66.5 mm
Shaft Diameter	: Ø 4.000 mm
Input Voltage	: 230.0 V DC
Rectified	: Rectified
No Load Speed	: 19815 rpm
Maximum Efficiency	: 61%
Torque at Maximum Efficiency	: 35.57 mNm
Speed at Maximum Efficiency	: 15035 rpm
Operating Temperature Range	: -10 to 50 °C
Storage Temperature Range	: -20 to 80 °C
Electrical Connection	: Leadwire


**Performance Data:**

	No Load	Stall	Maximum Efficiency	Maximum Power
Current (A)	0.13	-	0.46	-
Efficiency (%)	-	-	61	-
Output Power (W)	-	-	56.95	-
Speed (rpm)	19815	-	15035	-
Torque (mNm)	-	-	35.57	-


Application Examples:

Angle Grinders

Outline Drawing:

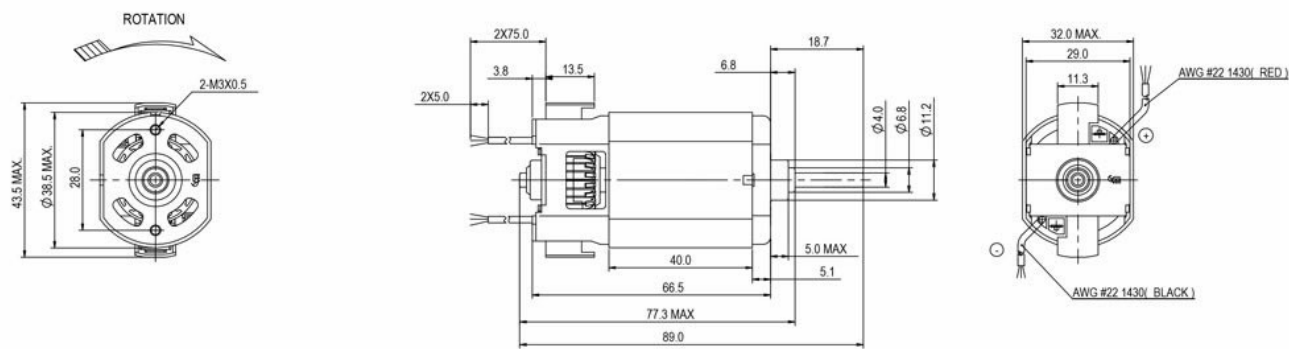

Performance Curves:

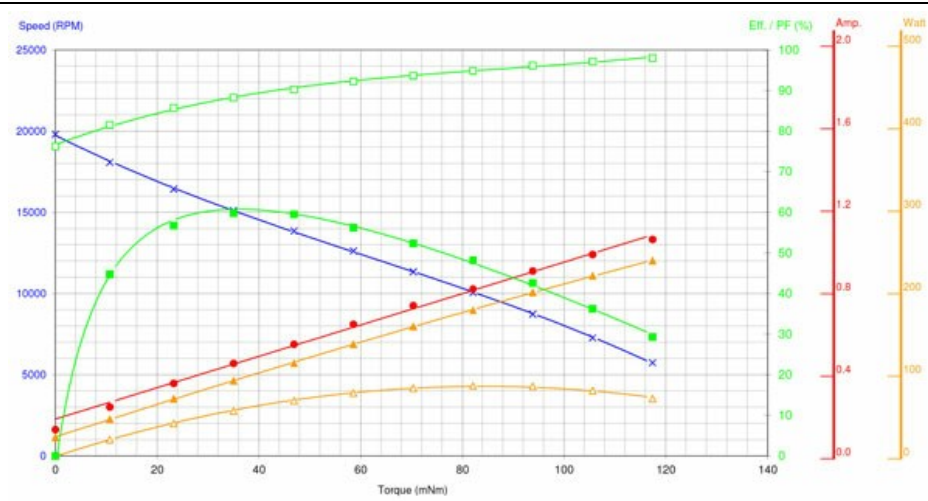

Units in Metric