

Characteristics:

Compact, High Reliability

Specifications:


Dimensions	: Ø 1.5 X 1.3 X 2.5 in
Shaft Diameter	: Ø 0.157 in
Input Voltage	: 120.0 V DC
No Load Speed	: 20795 rpm
Maximum Efficiency	: 56%
Speed at Maximum Efficiency	: 14874 rpm
Operating Temperature Range	: 14 to 122 °F
Storage Temperature Range	: -4 to 176 °F
Electrical Connection	: Terminal




Performance Data:

	No Load	Stall	Maximum Efficiency	Maximum Power
Current (A)	0.18	-	0.91	-
Efficiency (%)	-	-	56	-
Output Power (hp)	-	-	0.08	-
Speed (rpm)	20795	-	14874	-
Torque (Lb.in)	-	-	0.32	-

Outline Drawing:

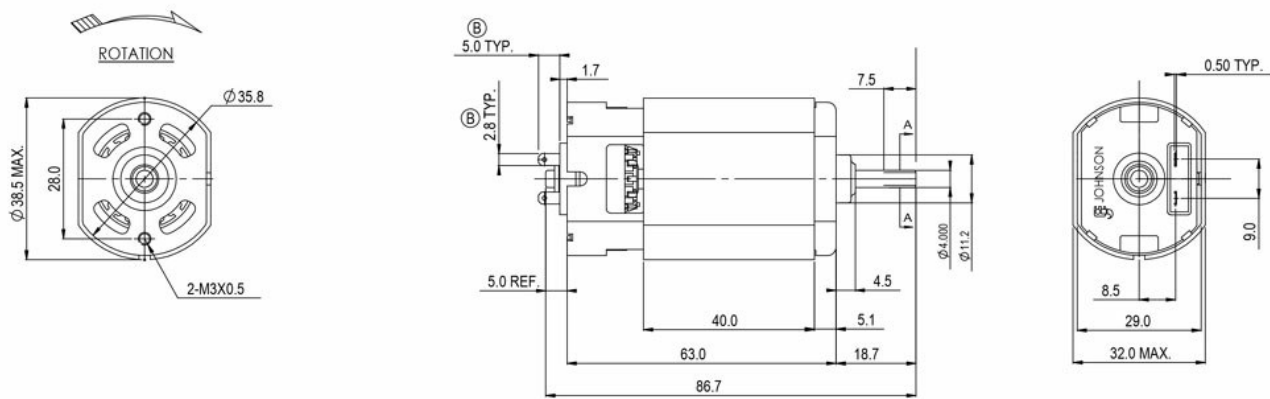

Performance Curves:

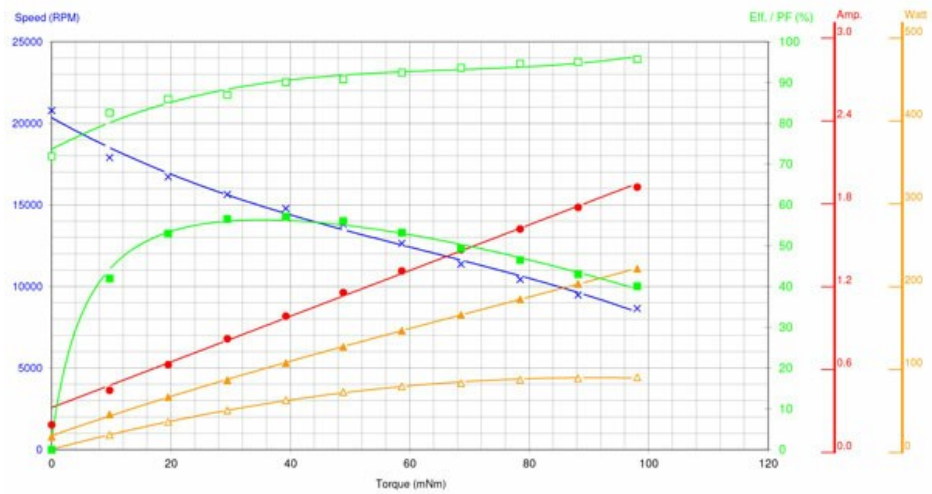

Units in Metric