

Characteristics:

Compact, High Reliability

Specifications:

Dimensions	: Ø 1.5 X 1.3 X 2.6 in
Shaft Diameter	: Ø 0.157 in
Input Voltage	: 230.0 V DC
Rectified	: Rectified
No Load Speed	: 14635 rpm
Maximum Efficiency	: 56%
Speed at Maximum Efficiency	: 10241 rpm
Operating Temperature Range	: 14 to 122 °F
Storage Temperature Range	: -4 to 176 °F
Electrical Connection	: Leadwire




Performance Data:

	No Load	Stall	Maximum Efficiency	Maximum Power
Current (A)	0.08	-	0.36	-
Efficiency (%)	-	-	56	-
Output Power (hp)	-	-	0.06	-
Speed (rpm)	14635	-	10241	-
Torque (Lb.in)	-	-	0.34	-


Application Examples:

Rotary Sanders

Outline Drawing:

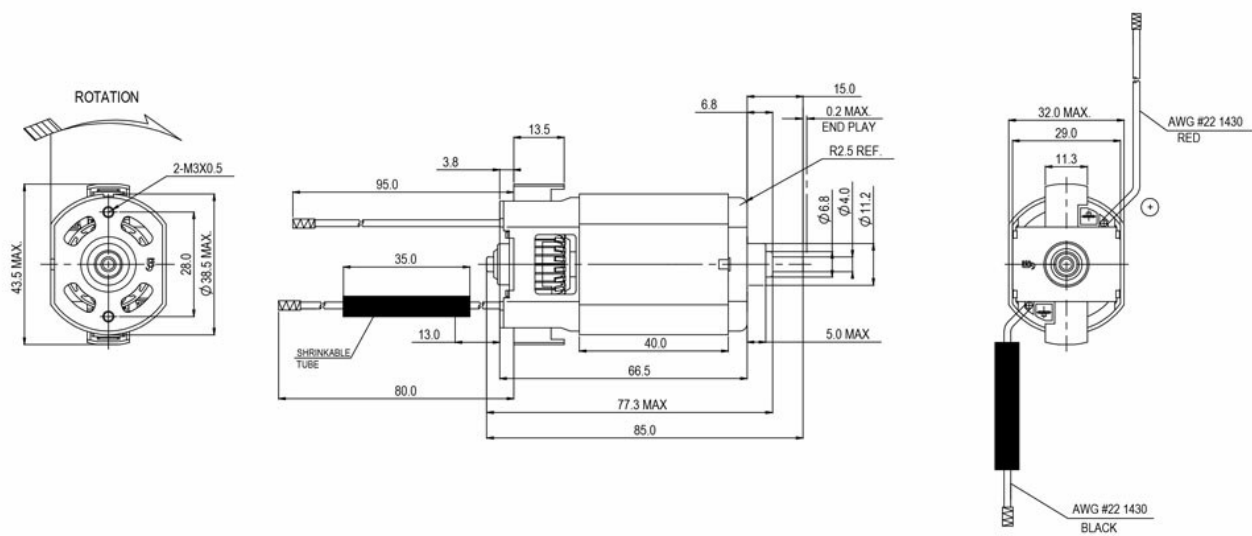

Performance Curves:

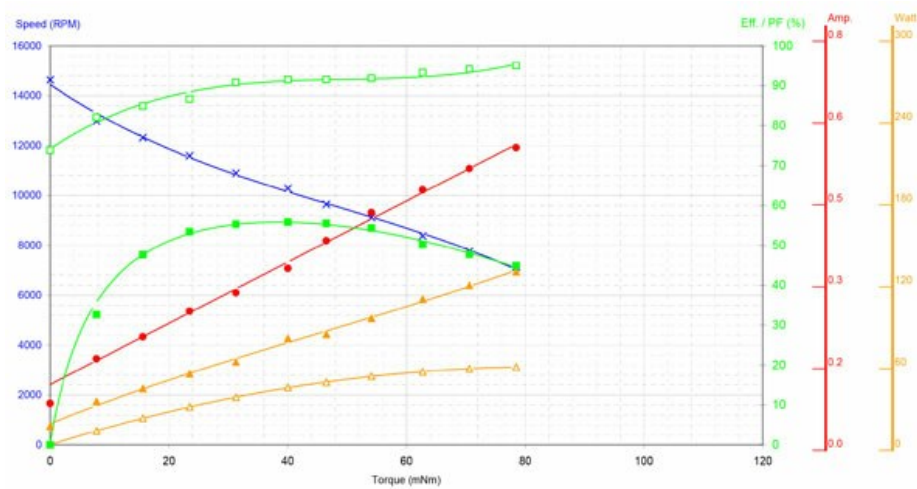

Units in Metric