

Characteristics:

Compact, low weight, low noise, low power budget

**Specifications:**

Package Dimension	: Ø 33.0 X 131.2 X 73.5mm
Input Voltage	: 13.0 V DC
No Load Speed	: 118.0 rpm
No Load Current	: 1.8 A
Maximum Output Power	: 26.5 W
Stall Torque	: 8.5 Nm
Life	: 20,000 cycles
Weight	: ~ 420 g
Operation Temperature	: -40 to 85 °C
Storage Temperature	: -40 to 100 °C
Certification	: RoHS


Performance Data:

	No Load	Stall	Max Eff	Max Power
Speed (rpm)	118	-	80	58.0
Current (A)	1.8	18	5.0	11.0
Torque (Nm)	-	8.5	1.7	4.3
Output Power (W)	-	-	16.0	26.5

Application Examples:


Sunroof Drives

Drawing:

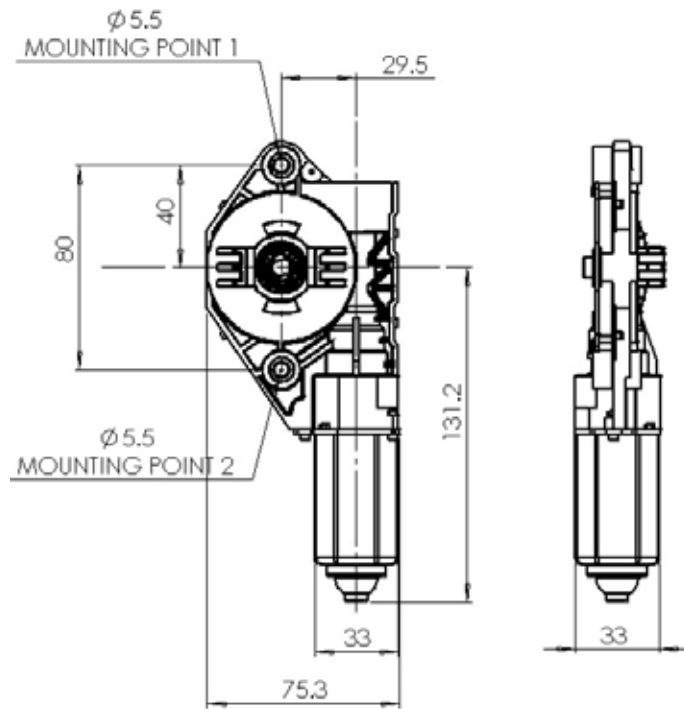

Unit in mm

Performance Curve:

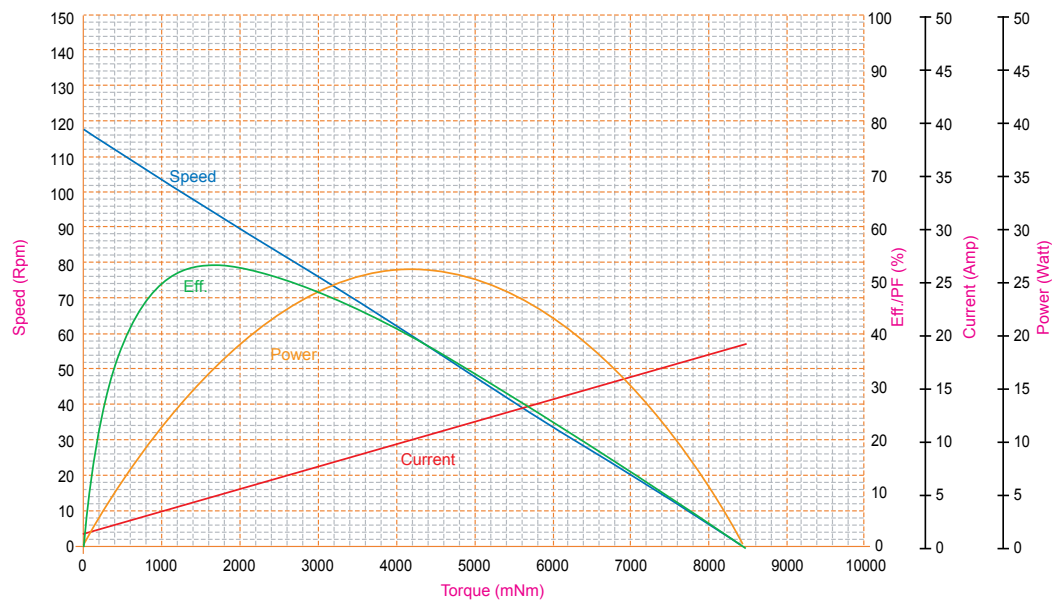

Unit in metric