

Characteristics:

Compact, low weight, low noise, low power budget



Specifications:

Package Dimension	: Ø 46.0 X 135.0 X 77.7 mm
Input Voltage	: 13.0 V DC
No Load Speed	: 122.9 rpm
No Load Current	: 1.6 A
Maximum Output Power	: 25.7 W
Stall Torque	: 7.5 Nm
Life	: 20,000 cycles
Weight	: ~ 580 g
Operation Temperature	: -40 to 85 °C
Storage Temperature	: -40 to 100 °C
Certification	: RoHS


Performance Data:

	No Load	Stall	Max Eff	Max Power
Speed (rpm)	122.9	-	95.6	61.4
Current (A)	1.6	19.5	5.588	10.6
Torque (Nm)	-	7.5	1.8	4.0
Output Power (W)	-	-	17.7	25.6

Application Examples:


Sunroof Drives

Drawing:

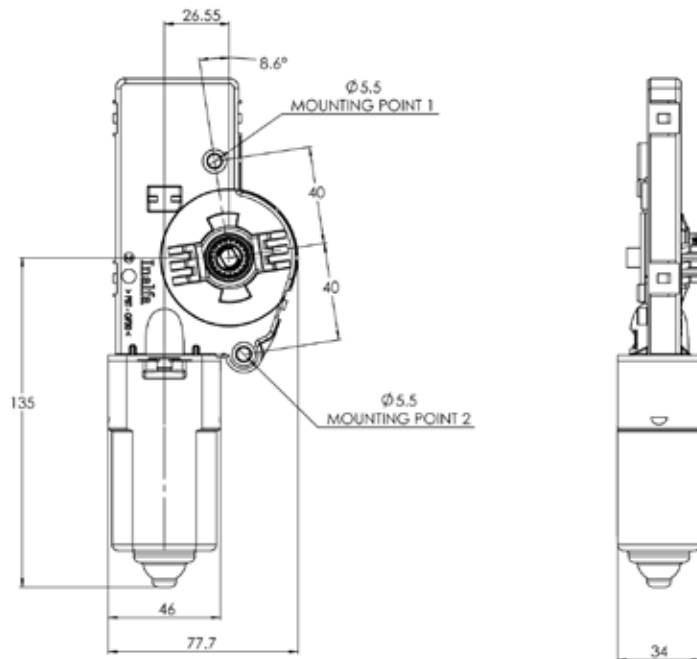

Unit in mm

Performance Curve:

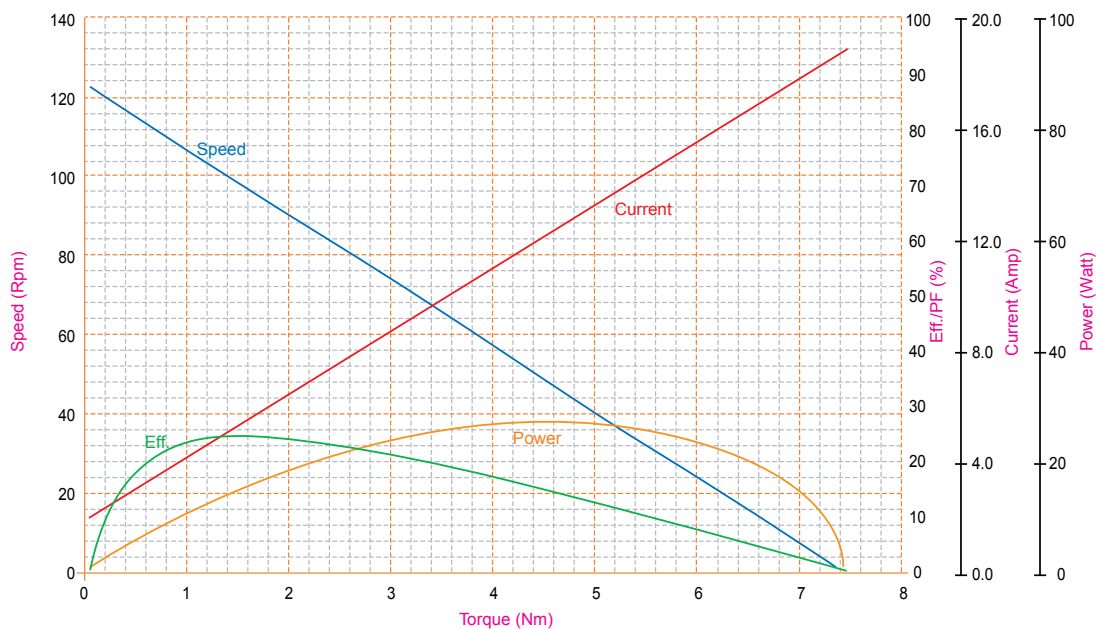

Unit in metric