

Characteristics:

Low Noise ASIC Motor™ Drain Pump with Volute

**Specifications:**

Dimensions (in)	: 43.1 X 36.6 X 57.0 in
Type	: Impeller Pumps
Input Voltage (V)	: 120.0 V AC
Max. Flow Rate (GPM)	: 6.34 GPM @ 1.31 psi
Max. Pressure (psi)	: 14.50 psi
Max. Pump Efficiency (%)	: 16%
Flow Rate at Max. Efficiency (GPM)	: 4.76 GPM
Noise Level	: 50 dBA
Noise Level Condition	: Pumping water at 0.24 inches distance from microphone
Life (Typical)	: 800 hr
Duty Cycle (cycles)	: 32000 cycles
Life Test Condition	: at 1.31 psi and ambient temperature water; 1.5 min ON, 1.5 min OFF
Operation Temperature (°F)	: 28.4 to 140 °F
Storage Temperature (°F)	: 5 to 167 °F
Electrical Connection	: RAST 2.5
Certification	: UL


Performance Data:

	Valve Fully Open	Typical Working Point	Max. Efficiency	Valve Closed
Flow Rate (GPM)	6.34	5.81	4.76	-
Speed (rpm)	3600.00	3600.00	3600.00	3600.00
Input Power (hp)	0.03	0.01	0.03	0.02
Efficiency (%)	13.00	15.00	16.00	-
Pressure (psi)	1.31	1.45	1.74	2.76

Application Examples:

Drain Pumps, Dishwasher Drain Pumps, Washing Machine Drain Pumps

Drawing:

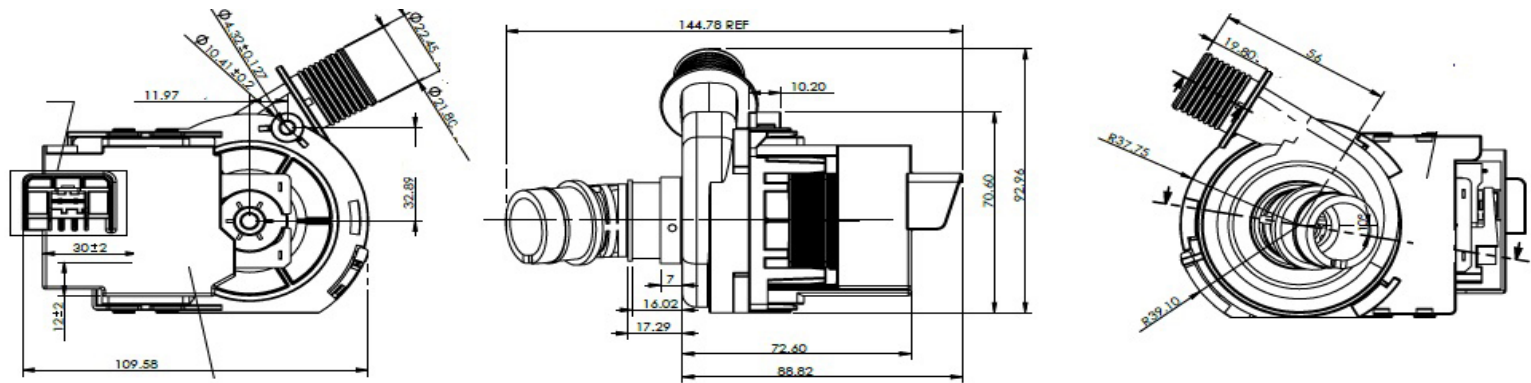

Performance Curves:

