

225mm Plastic Backward Centrifugal Fan


SPECIFICATIONS

- Material: Impeller: Plastic
Rotor: Zinc Plating Steel
Electronics housing: Die-cast aluminium
- Number of blades: 7
- Direction of rotation: Clockwise viewed toward rotor
- Insulation class: "B"
- Installation position: Any
- Degree of protection: IP54
- Condensation drainage holes: None
- Mode: Continuous operation (S1)
- Mounting: Maintenance-free ball bearings
- Technical features: Controller input PWM/0-10V
- Cable exit: Variable
- Protection class: I (with customer connection of protective earth)
- Conformity with standards: EN 60335-1 / UL
- Weight: 1.6KG




PERFORMANCE

Nominal data	Platform	Nominal voltage range	Frequency	Speed*	Max input power*	Max input current*	Operating ambient temp	Life time	Curve	PWM/0-10V
Type	Motor	VAC	Hz	rpm	W	A	°C	Hr		
ECO225CB126072220	ECO-072-025-126-PA-221	120	50 / 60	2850	170	2.35	-20 to +60	40,000	A	●
ECO225CB235072220	ECO-072-025-235-PA-221	230		2890		1.32			B	

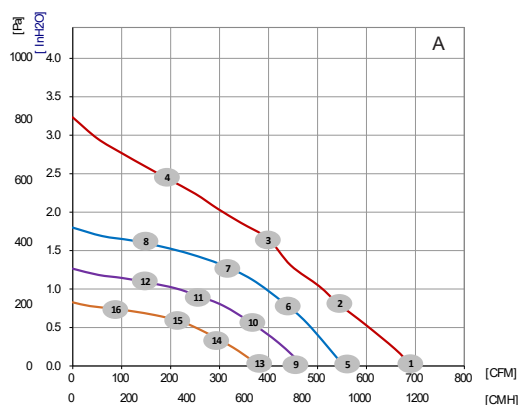


	n (rpm)	P1 (W)	I (A)	η (%)	P (Pa)	P (inH ₂ O)	Q (CMH)	Q (CFM)
①	3040	160	2.24	0	0	0	1200	707
②	2860	168	2.34	30.66	203	0.81	921	542
③	2850	169	2.35	45.83	412	1.65	678	400
④	3010	165	2.27	33.72	606	2.43	329	194
⑤	2430	83	1.17	—	0	0	942	555
⑥	2430	110	1.5	37.7	205	0.82	732	431
⑦	2430	104	1.42	45.1	329	1.32	515	303
⑧	2430	78	1.1	29.3	406	1.63	204	120
⑨	2040	51	0.75	—	0	0	803	473
⑩	2040	65	0.93	36.8	139	0.56	622	366
⑪	2040	62	0.89	44	227	0.91	435	256
⑫	2040	55	0.80	35.9	270	1.08	265	156
⑬	1660	29	0.45	—	0	0	648	382
⑭	1660	37	0.55	33.9	90	0.36	499	294
⑮	1660	35	0.53	42.1	147	0.59	366	215
⑯	1660	27	0.43	27.7	185	0.74	148	87

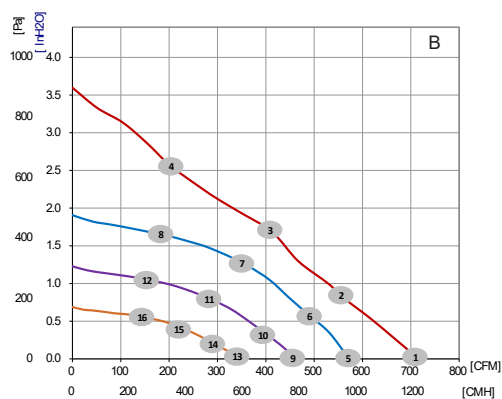


	n (rpm)	P1 (W)	I (A)	η (%)	P (Pa)	P (inH ₂ O)	Q (CMH)	Q (CFM)
①	3120	172	1.32	—	0	0	1200	707
②	2910	173	1.32	30.6	201	0.81	955	562
③	2890	172	1.32	47.2	420	1.68	702	413
④	3080	173	1.32	35.1	638	2.56	344	203
⑤	2510	91	0.74	—	0	0	974	574
⑥	2510	109	0.86	30.1	141	0.57	836	492
⑦	2510	113	0.89	46.6	308	1.24	616	363
⑧	2510	99	0.79	37.1	410	1.65	323	190
⑨	2010	49	0.42	—	0	0	787	464
⑩	2010	59	0.49	27.4	87	0.35	674	397
⑪	2010	61	0.51	43.7	195	0.78	492	290
⑫	2010	56	0.47	36.1	259	1.04	281	166
⑬	1510	26	0.24	—	0	0	588	346
⑭	1510	30	0.27	22.1	47	0.19	504	297
⑮	1510	30	0.27	36.9	110	0.44	365	215
⑯	1510	29	0.27	33.1	139	0.56	250	147


DRAWING

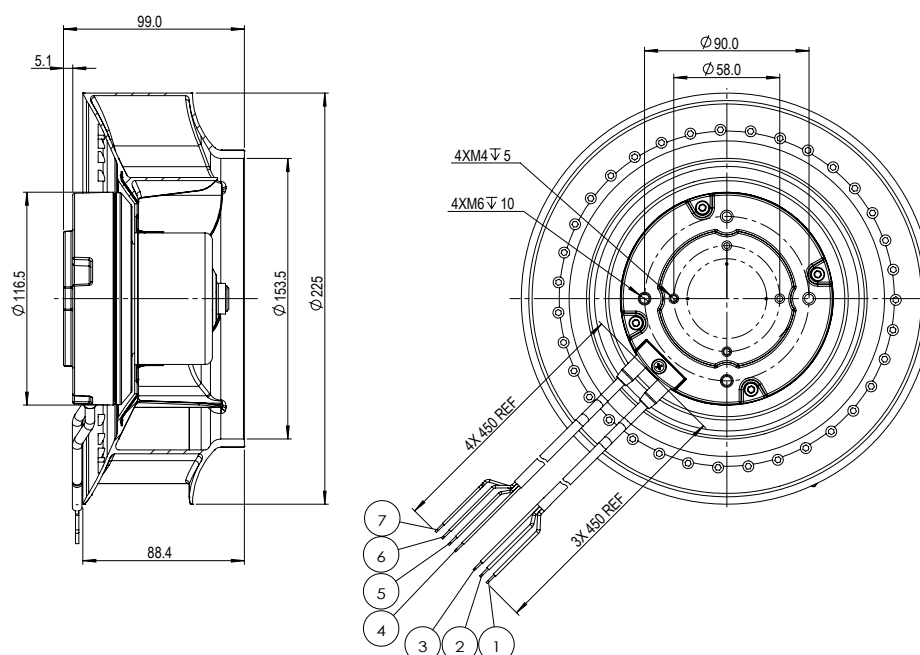

DIAGRAM

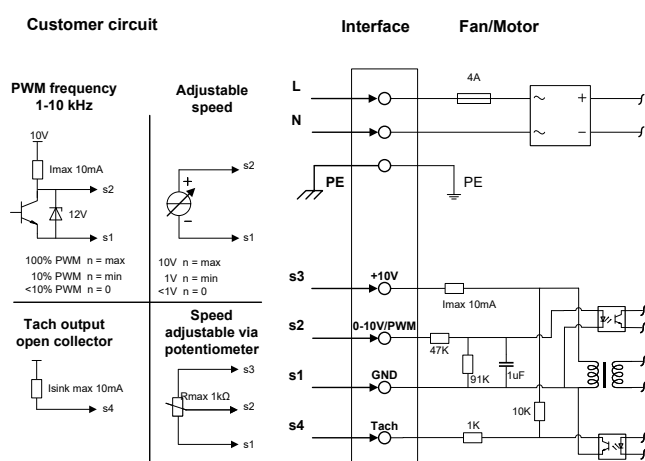

ECO225CB126072220

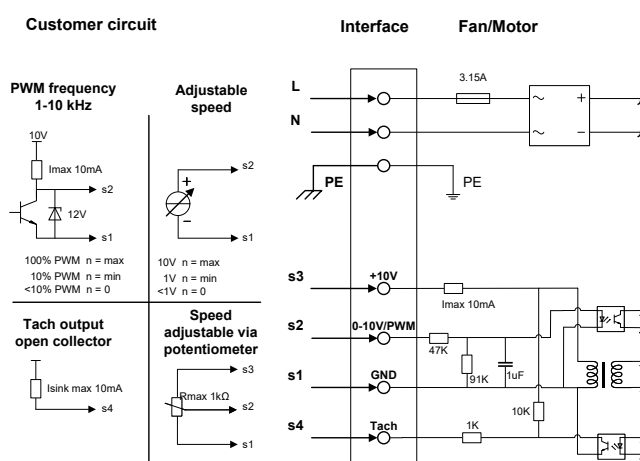

ECO225CB235072220

NO.	DESIGNATION	COLOR	ASSIGNMENT
1	L	BROWN	POWER SUPPLY
2	N	BLUE	NEUTRAL
3	PE	GREEN/YELLOW	PROTECTIVE EARTH
4	GND	BLACK	GND CONNECTION FOR CONTROL INTERFACE, SELV
5	PWM/0-10V	YELLOW	CONTROL INPUT PWM/0-10V, SELV
6	TACHO	WHITE	TACHO OUT, 1 PULSE/REVOLUTION, SELV
7	+10V	RED	VOLTAGE OUTPUT 10 VDC, SELV