


Characteristics:

Controllable Flow Rate

Specifications:

Dimensions	: 28.0 X 62.0 X 28.0 mm
Input Voltage	: 24.0 V DC
Rated Flow Rate 1	: 420 ml/min @ 0.80 bar
Rated Flow Rate 2	: 320 ml/min @ 1.20 bar
Max Flow Rate	: 560.00 ml/min @ 0.15 bar
Max Pressure	: 3.00 bar
Fluid Temperature Range	: 5 to 55 °C
Fluid Type	: water, detergent, high viscosity fluids
Maximum Efficiency	: 32 %
Maximum Efficiency of Motor	: 42 %
Flow Rate at Maximum Efficiency	: 320 ml/min
Noise Level	: 70 dBA
Noise Level Condition	: Noise probe located at 0.1m from pump body
Other Feature	: Self Prime Height: 20cm under flow rate of 560ml/min; Inlet & Outlet OD: 4.5mm ; Speed adjustable ; Reversible flow
Life (typical)	: 200 hr
Life Test Condition	: 15s ON / 15s OFF, cold water at 20°C @ 1.0bar
Weight	: 75 g
Operation Temperature	: 2 to 50 °C
Storage Temperature	: -20 to 85 °C
Electrical Connection	: Connector Housing Terminal
Certification	: Option for FDA certification


**Performance Data:**

	Valve Fully Open	Typical Working Point	Max Efficiency	Valve Closed
Water Flow Rate (ml/min)	560	420	320	-
Input Power to Motor (W)	6.50	7.50	8.50	-
Efficiency (% , Pump)	-	-	32	-
Efficiency (% , Motor)	-	-	42	-
Water Pressure (bar)	0.15	0.80	1.20	3.00


Application Examples:

Beverage Machines, Beverage Dispensing, Coffee Machines, Pumps, Detergent Dosing, Sprayers

Drawing:

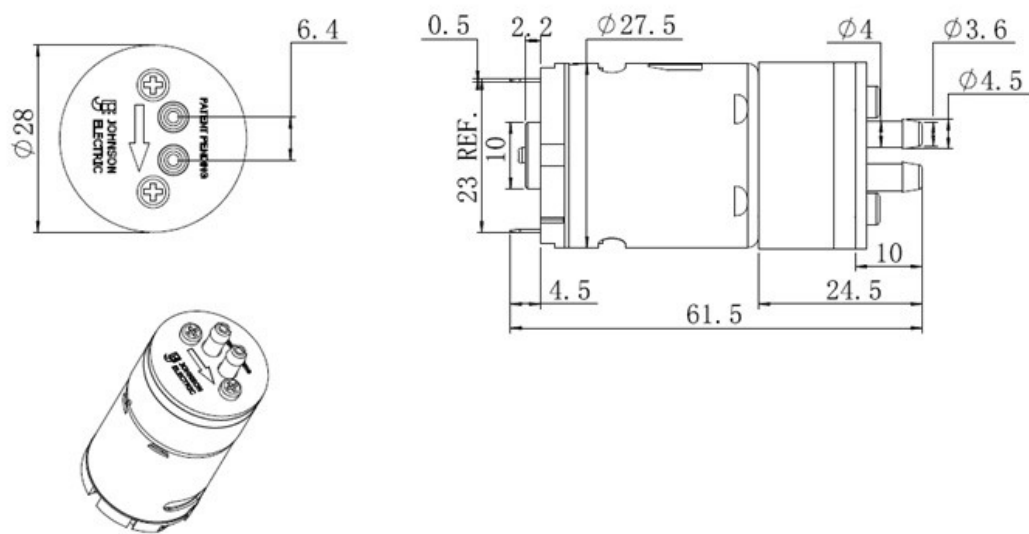

Performance Curves:

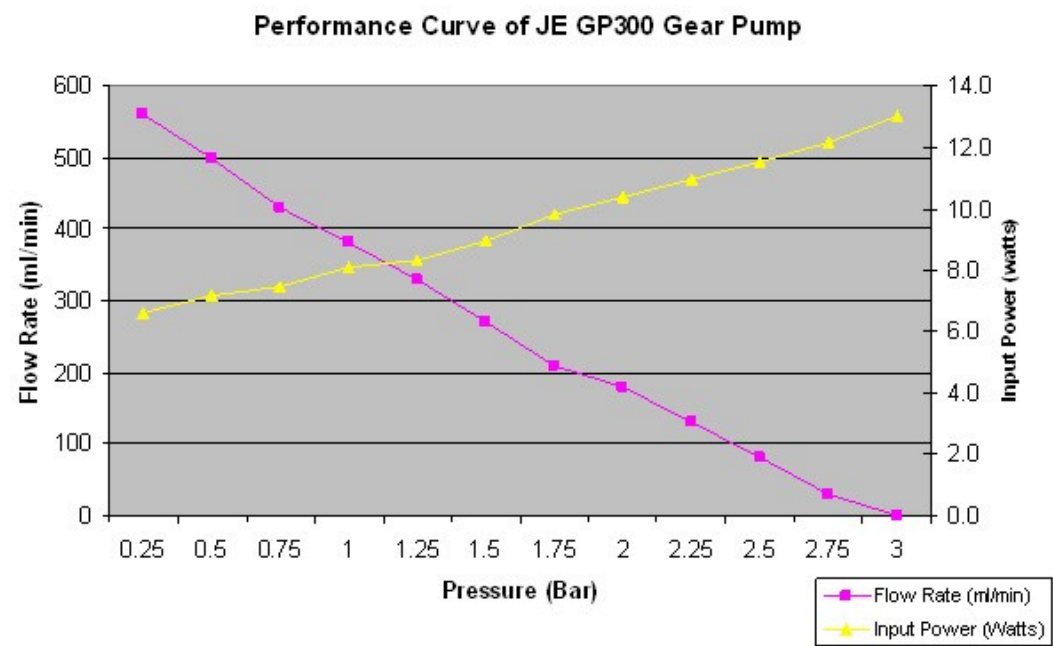

Units in Metric