

Characteristics:

High Reliability, High Torque, Low Cogging

Specifications:

Dimensions	: Ø 1.4 X 2.2 in
Shaft Diameter	: Ø 0.125 in
Input Voltage	: 24.0 V DC
No Load Speed	: 5350 rpm
Stall Torque	: 2.96 lb.in
Maximum Output Power	: 0.06
Maximum Efficiency	: 77%
Operating Temperature Range	: 14 to 122 °F
Storage Temperature Range	: -4 to 176 °F
Electrical Connection	: Terminal





Performance Data:

	No Load	Stall	Maximum Efficiency	Maximum Power
Current (A)	0.14	7.95	1.04	4.04
Efficiency (%)	-	-	77	48
Output Power (hp)	-	-	0.03	0.06
Speed (rpm)	5350	-	4731	2675
Torque (Lb.in)	-	2.96	0.34	1.48

Application Examples:

Paper Lifts and Feeds

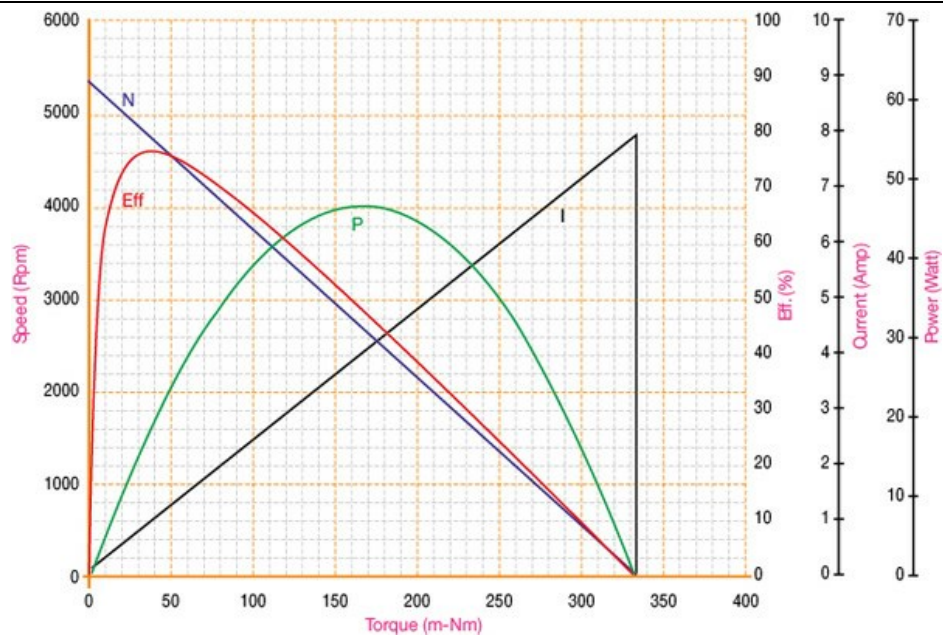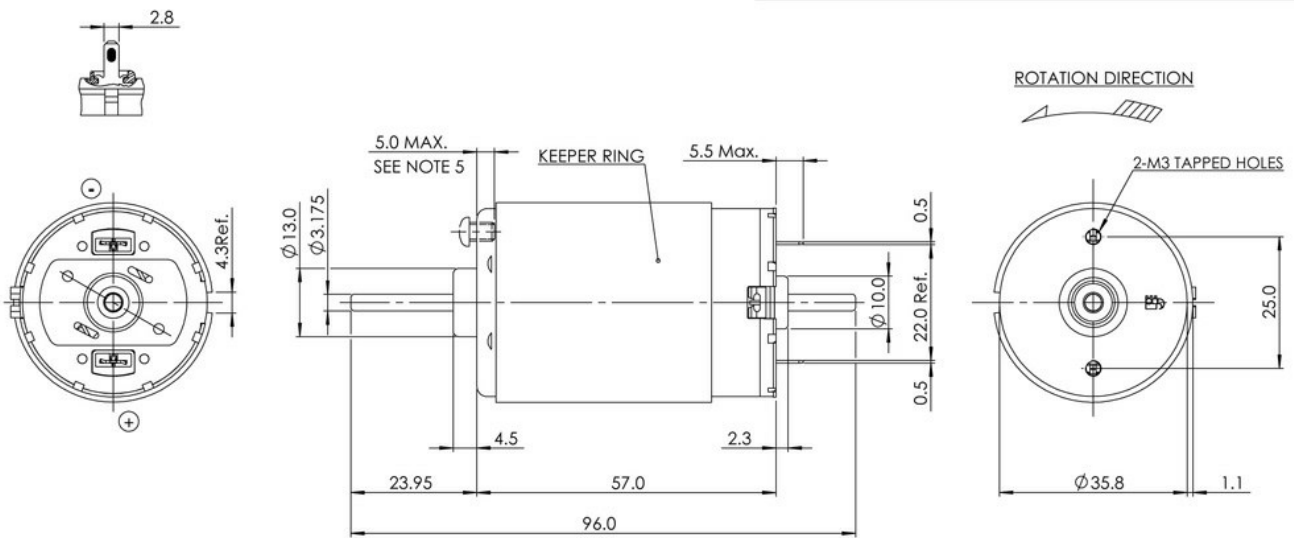

Units in Metric