

Characteristics:

High Power, Compact Size, High Efficiency

Specifications:

Dimensions	: Ø 1.4 X 2.2 in
Shaft Diameter	: Ø 0.125 in
Input Voltage	: 10.8 V DC
No Load Speed	: 21524 rpm
No Load Current	: 2.75 A
Stall Torque	: 5.93 lb.in
Stall Current	: 132.47 A
Maximum Output Power	: 0.51
Maximum Efficiency	: 81%
Weight	: 9 oz
Operating Temperature Range	: 14 to 122 °F
Storage Temperature Range	: -4 to 176 °F
Electrcial Connection	: Leadwire




Performance Data:

	No Load	Stall	Maximum Efficiency	Maximum Power
Current (A)	2.75	132.47	19.09	67.61
Efficiency (%)	-	-	81	-
Output Power (hp)	-	-	0.22	0.51
Speed (rpm)	21524	-	18813	10762
Torque (Lb.in)	-	5.93	0.75	2.97

Application Examples:

Drills and Hammer Drills, Screw Drivers

Outline Drawing:

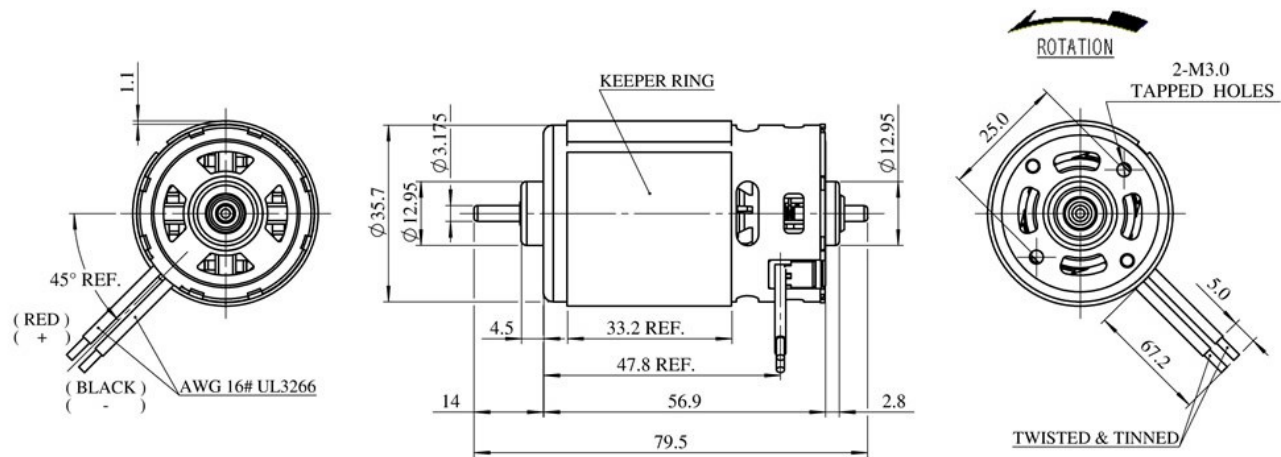

Units in Metric