

Characteristics:

low cost and low noise suppressed motor for headlamp adjuster application

Specifications:

Dimensions	: Ø 0.803148 X 0.606298 X 1.50787 in in
Shaft Diameter	: Ø 0.079 in
Input Voltage	: 11.2 V DC
No Load Speed	: 13787 rpm
Stall Torque	: 0.05 lb.in
Maximum Output Power	: 0.00
Maximum Efficiency	: 47%
Operating Temperature Range	: -40 to 185 °F
Storage Temperature Range	: -40 to 185 °F
Electrcial Connection	: Female Terminal




Performance Data:

	No Load	Stall	Maximum Efficiency	Maximum Power
Current (A)	0.08	0.90	0.26	0.49
Efficiency (%)	-	-	47	-
Output Power (hp)	-	-	0.06	0.00
Speed (rpm)	13787	-	10687	6894
Torque (Lb.in)	-	0.05	0.01	0.02


Application Examples:

Headlamp Adjusters

Outline Drawing:

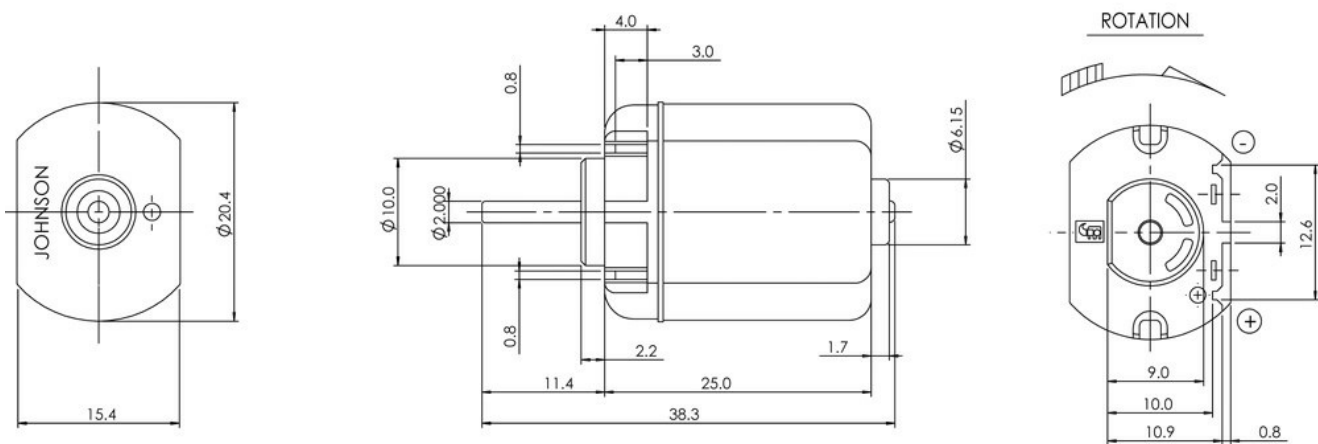

Performance Curves:

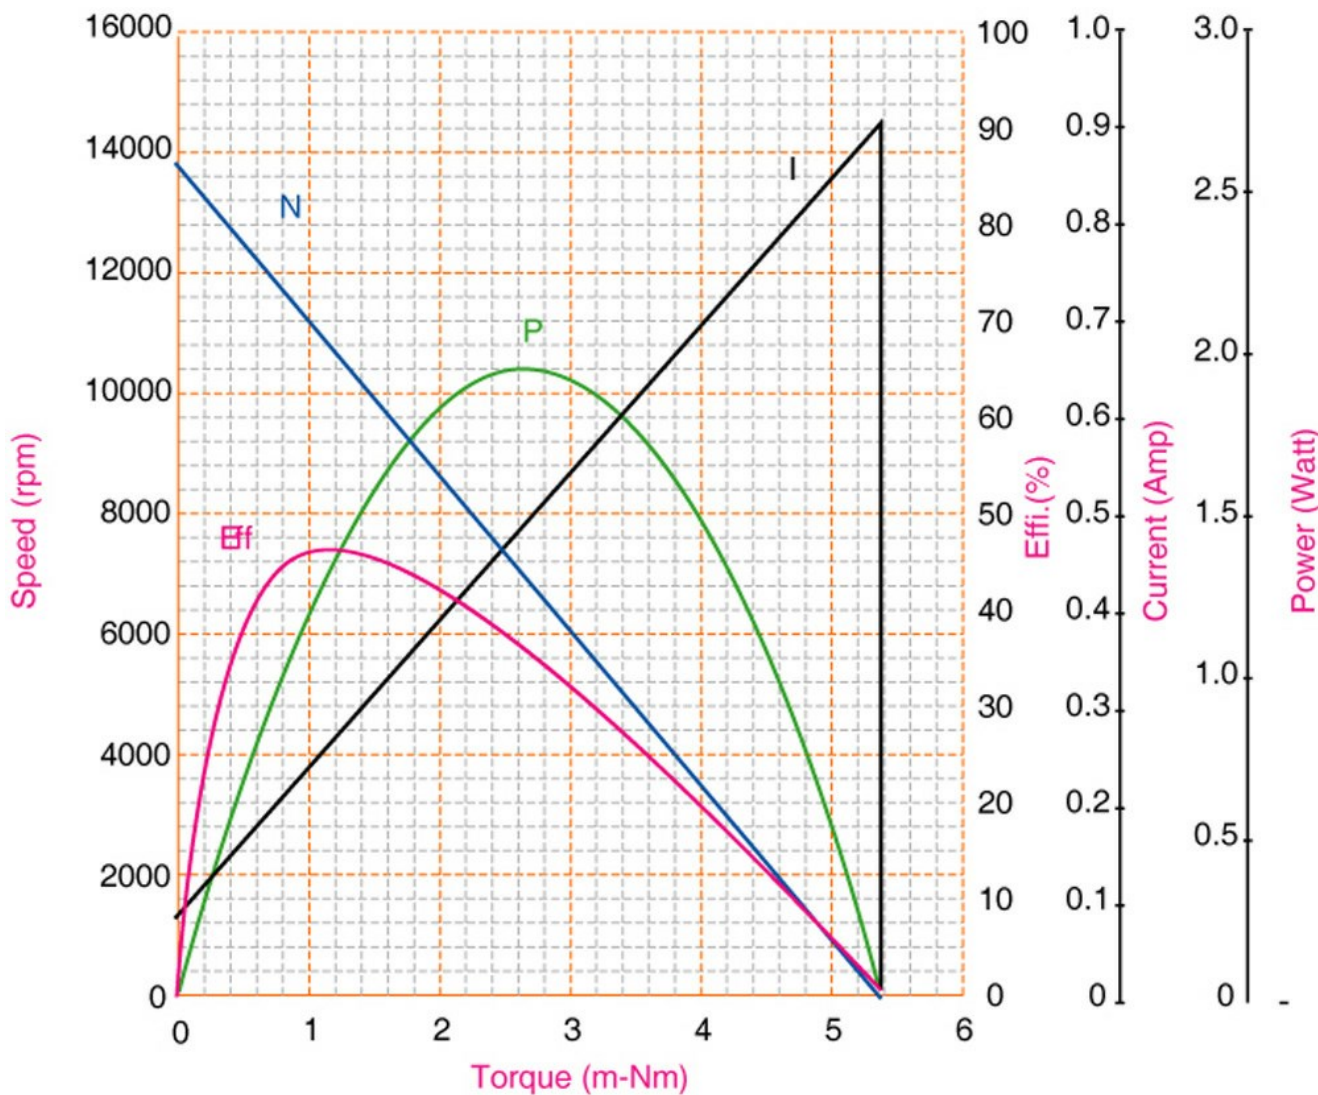

Units in Metric