

Characteristics:

Compact size, High reliability

Specifications:


Dimensions	: Ø 0.3 X 0.6 in
Shaft Diameter	: Ø 0.039 in
Input Voltage	: 4.5 V DC
No Load Speed	: 22551 rpm
Stall Torque	: 0.01 lb.in
Maximum Output Power	: 0.00
Maximum Efficiency	: 54%
Operating Temperature Range	: 14 to 122 °F
Storage Temperature Range	: -4 to 176 °F
Electrical Connection	: Leadwire/connector




Performance Data:

	No Load	Stall	Maximum Efficiency	Maximum Power
Current (A)	0.03	0.44	0.12	0.24
Efficiency (%)	-	-	54	72
Output Power (hp)	-	-	0.00	0.00
Speed (rpm)	22551	-	17825	11276
Torque (Lb.in)	-	0.01	0.00	0.00

Outline Drawing:

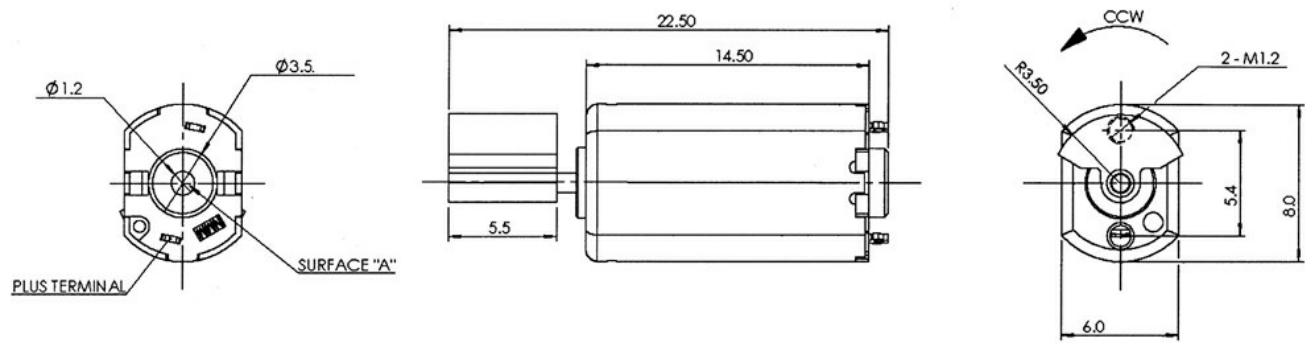

Performance Curves:

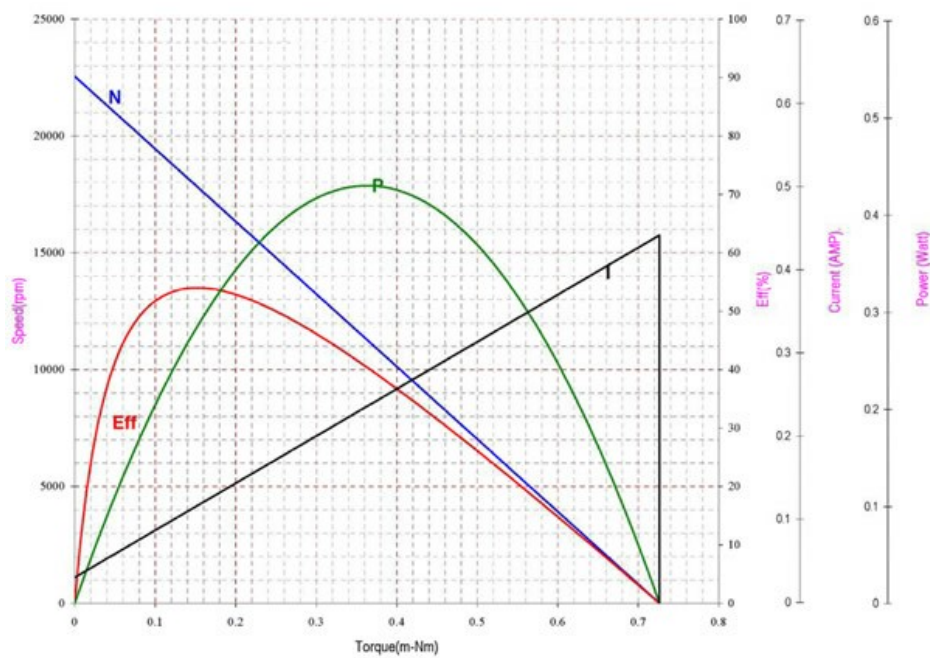

Units in Metric