

**Characteristics:**

Low noise and vibration, Long life, Advanced EMC suppression

**Specifications:**


Dimensions	: Ø 0.960628 X 1.95669 in
Shaft Diameter	: Ø 0.079 in
Input Voltage	: 12.0 V DC
No Load Speed	: 2546 rpm
No Load Current	: 0.01 A
Nominal Speed	: 2076 rpm
Nominal Torque	: 0.01 lb.in
Nominal Current	: 0.05 A
Stall Torque	: 0.08 lb.in
Stall Current	: 0.21 A
Maximum Output Power	: 0.00
Maximum Efficiency	: 61%
Weight	: 2 oz
Operating Temperature Range	: -40 to 185 °F
Storage Temperature Range	: -40 to 185 °F




**Performance Data:**

	No Load	Stall	Maximum Efficiency	Maximum Power
Current (A)	0.01	0.21	0.05	0.11
Efficiency (%)	-	-	61	-
Output Power (hp)	-	-	0.00	0.00
Speed (rpm)	2546	-	2076	1273
Torque (Lb.in)	-	0.08	0.01	0.04

Outline Drawing:

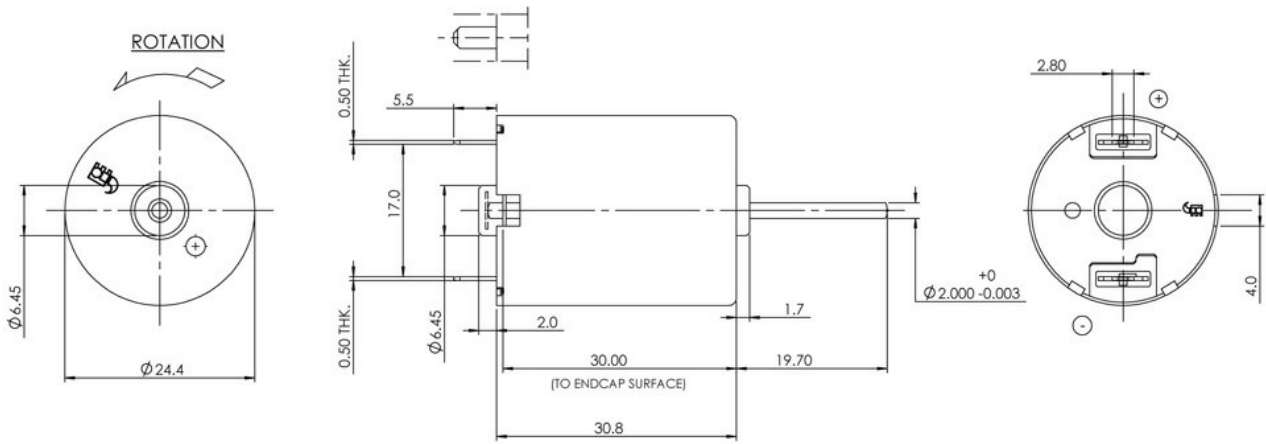

Performance Curves:

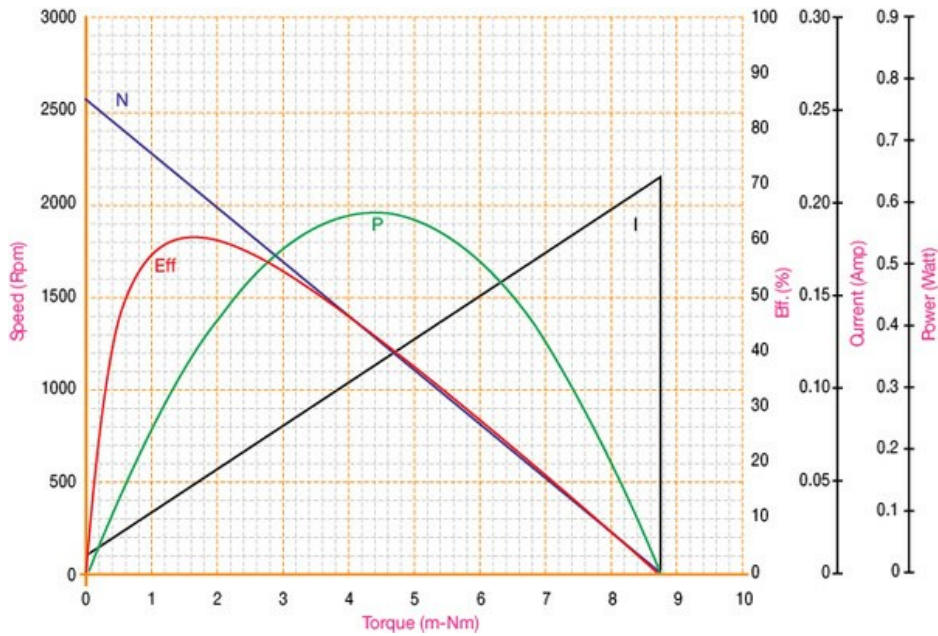

Units in Metric