

Characteristics:

For Full Size SUV & MPV

Highest Driving Torque, Highest Holding Torque, Compact
Position Sensor Integrated, Advanced EMC Suppression

Specifications:

Dimensions :	Ø 29 X 128 mm
Shaft Diameter :	Ø 3.175
Input Voltage :	12 V DC
No Load Speed *:	320 rpm
No Load Current*:	1.6 A
Stall Torque* :	7.5 Nm
Maximum Output Power:	65 W
Maximum Efficiency:	50 %
Weight:	285 g
Operation Temperature:	-40 to 80 °C
Storage Temperature:	-40 to 110 °C

* Typical




Performance:

	No Load	Stall	Max Efficiency	Max Power
Current (A)	1.6	-	6.5	15.0
Efficiency (%)	-	-	50.4	36.0
Output Power (W)			39.5	65.2
Speed (rpm)	320	-	266	164
Torque (Nm)	-	7.5	1.4	3.8

Application Examples:

Power Lift Gate

Drawing:

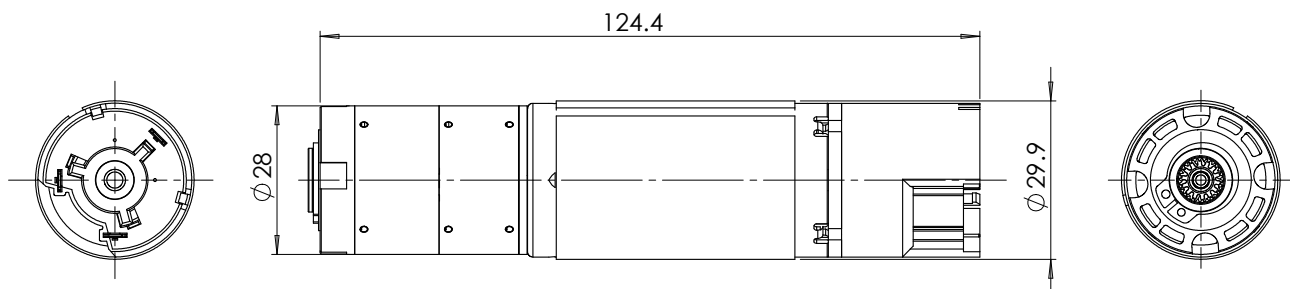

Unit in mm

Performance Curve:

