


## Characteristics:

Breakable Conductor, High Security, Peeling Protection, Intrusion Protection

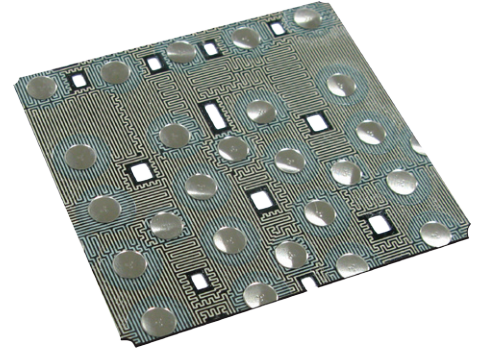

## Specifications:

Line width / space : 250µm / 250µm  
Circuit Size : Customisable  
Construction : Single sided  
Base Material : 100µm PET  
Base substrate colour : Black  
Track Resistance : Customisable  
Environmental performance : 85°C, 85% RH, 96 hours  
Peeling Protection : Conductor breakable within 10mm

### Connection Type

For ZIF/LIF type connector	≥ 1.00mm pitch with stiffener fitted
Crimp connector fitted	2.54mm pitch
Conductive PSA	Suitable for within body connection to pcb
Metal dome	Suitable for within body connection to pcb

## Application:

Point of Sales: Secure Microprocessor, Smart Card Connector, Keypad, PIN pad, PCB