


Characteristics:

Long life, low noise and high reliability

**Specifications:**

Dimensions (mm)	: Ø 63.0 X 35.0 X 78.5 mm
Shaft Diameter (mm)	: Ø 6.000 mm
Input Voltage (V)	: 230.0 V
No Load Speed (rpm)	: 2916 rpm
No Load Current (A)	: 0.85 A
Nominal Speed (rpm)	: 2570 rpm
Nominal Torque (mNm)	: 60.00 mNm
Nominal Current (A)	: 0.75 A
Stall Torque (mNm)	: 39.00 mNm
Stall Current (A)	: 1.07 A
Maximum Output Power (W)	: 23.50 W
Maximum Efficiency (%)	: 26%
Torque (mNm) - Max Eff	: 92.40 mNm
Speed (rpm) - Max Eff	: 2424 rpm
Life (Typical)	: 1000 hr
Weight (g)	: 1140 g
Operating Temperature Range (°C)	: -10 to 55 °C
Storage Temperature Range (°C)	: -20 to 80 °C
Electrical Connection	: Terminals


Performance Data:

	No Load	Stall	Max Efficiency	Max Power
Current (A)	0.85	1.07	0.92	0.94
Efficiency (%)	-	-	26.00	25.59
Output Power (W)	-	-	22.89	23.46
Speed (rpm)	2916.00	-	2424.00	2306.00
Torque (mNm)	-	39.01	92.39	97.79

Application Examples:

Nebulizers

Drawing:

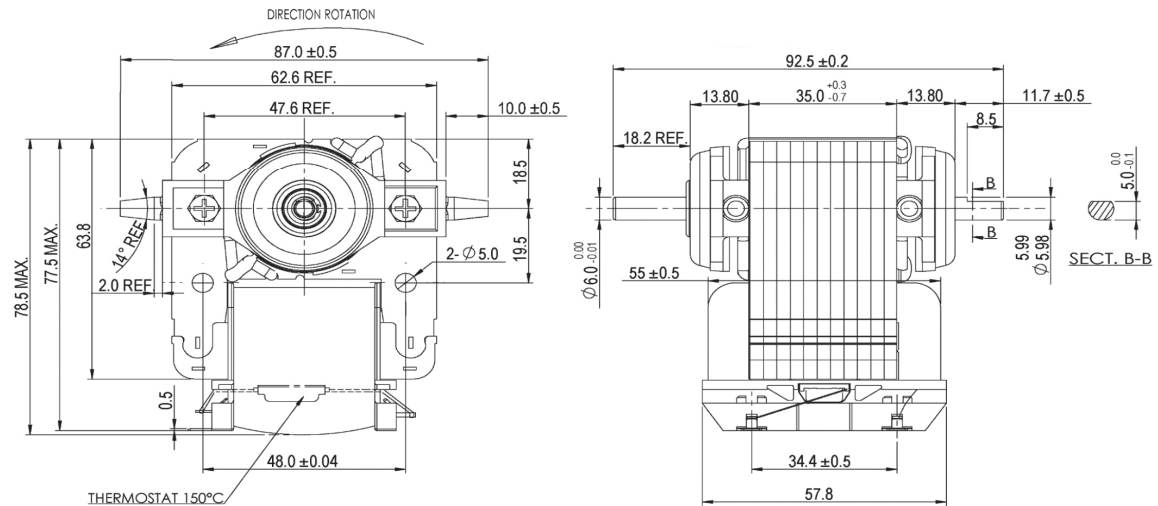

Performance Curves:

