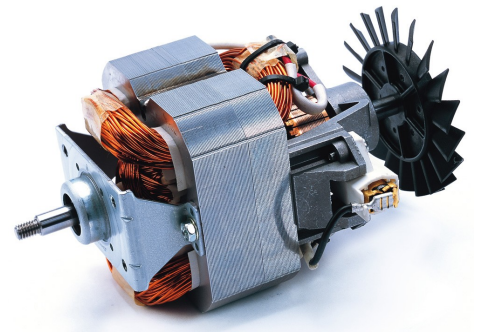


Characteristics:

High Power

Specifications:

Dimensions	: Ø 3.9 X 6.5 in
Shaft Diameter	: Ø 0.315 in
Input Voltage	: 240.0 V AC , 50
Maximum Output Power	: 1.1365 hp
Maximum Efficiency	: 63 %
Torque at Maximum Efficiency	: 4.98 lb.in
Speed at Maximum Efficiency	: 12488 rpm
Output Power at Maximum Efficiency	: 0.9838 hp
Weight	: 59 oz
Operation Temperature	: 14 131 °F
Storage Temperature	: -4 176 °F
Electrical Connection	: Lead Wire
Certification	: CE, RoHS


**Performance Data:**

	No Load	Typical Loading	Max Efficiency	Max Power
Current (A)	2.02	4.20	5.09	6.23
Efficiency (%)	-	60	63	61
Output Power (hp)	-	0.82	0.9838	1.1366
Speed (rpm)	22141	12892	12488	10325
Torque (lb.in)	-	4.80	4.98	7.08


Application Examples:

Blenders, Commercial Blenders, Bar Blenders, Table Blenders, Stand Mixer

Drawing:

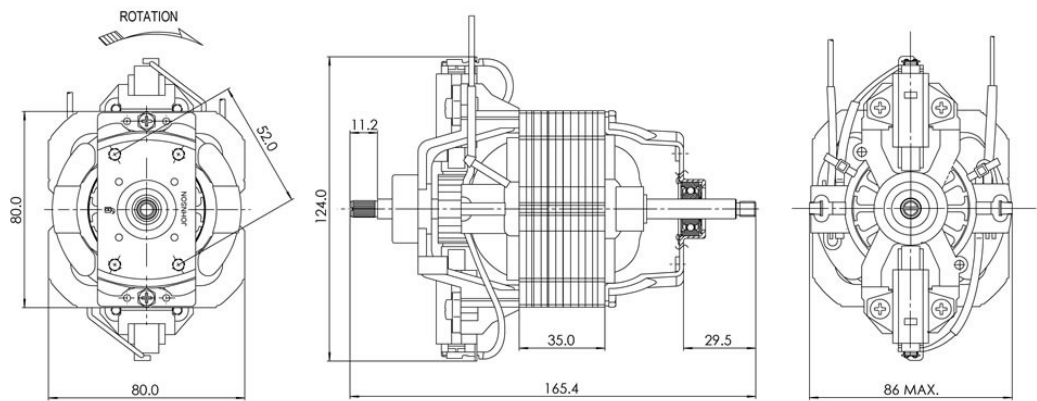

Performance Curves:

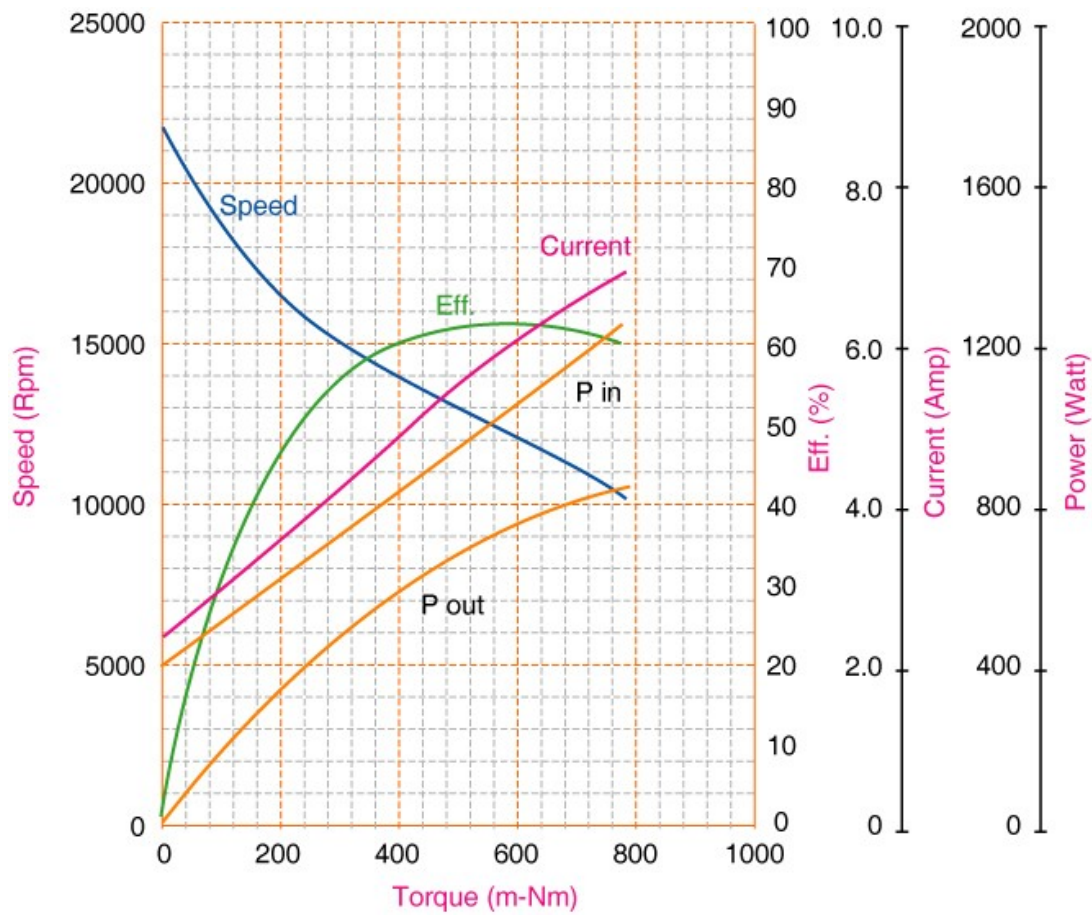

Units in Metric