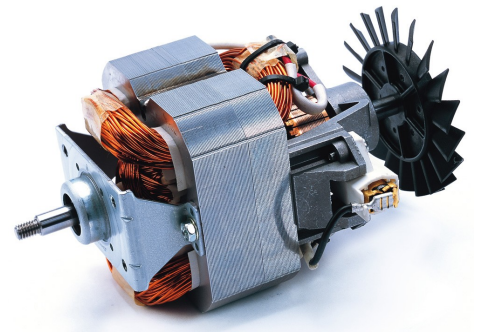


Characteristics:

High Power

Specifications:

Dimensions	: Ø 98.0 X 166.0 mm
Shaft Diameter	: Ø 8.000 mm
Input Voltage	: 240.0 V AC , 50 Hz
Maximum Output Power	: 847.48 W
Maximum Efficiency	: 63 %
Torque at Maximum Efficiency	: 562.35 mNm
Speed at Maximum Efficiency	: 12488 rpm
Output Power at Maximum Efficiency	: 734 W
Weight	: 1683 g
Operation Temperature	: -10 to 55 °C
Storage Temperature	: -20 to 80 °C
Electrical Connection	: Lead Wire
Certification	: CE, RoHS


**Performance Data:**

	No Load	Typical Loading	Max Efficiency	Max Power
Current (A)	2.02	4.20	5.09	6.23
Efficiency (%)	-	60	63	61
Output Power (W)	-	609.10	733.65	847.58
Speed (rpm)	22141	12892	12488	10325
Torque (mNm)	-	542.10	562.35	800.00


Application Examples:

Blenders, Commercial Blenders, Bar Blenders, Table Blenders, Stand Mixer

Drawing:

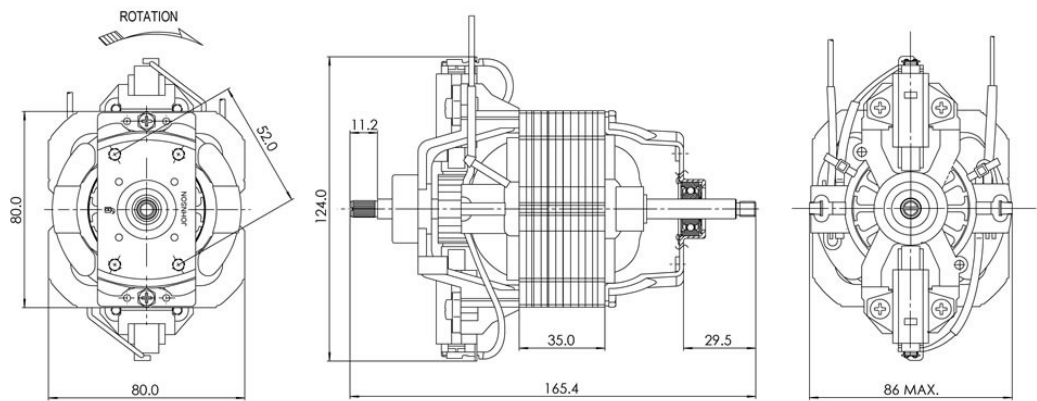

Performance Curves:

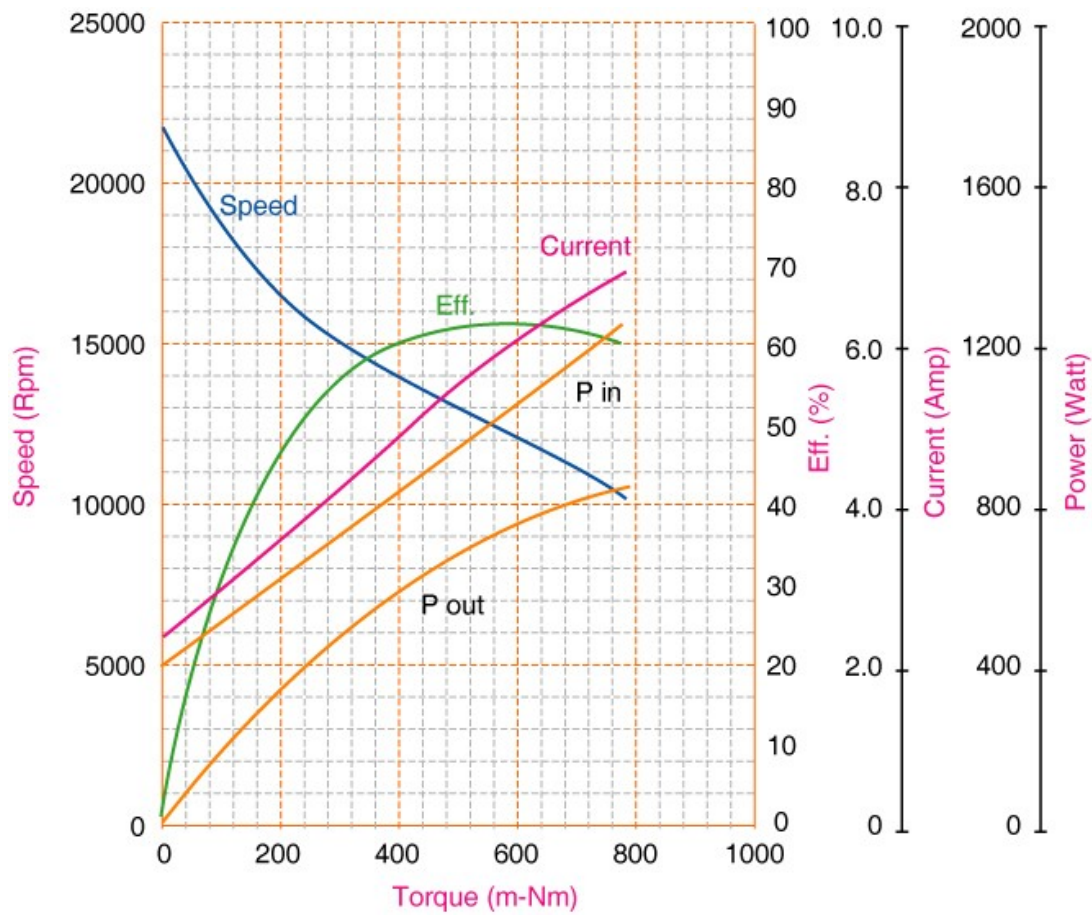

Units in Metric