

## UCB1/7; UCB2/8

Dimensions (mm) Ø 28 x 24


Step angle (°) 15

Holding torque\*  
(cNm) 1.1–2.4

Detent torque (cNm) 0.17/0.38

Winding bipolar/unipolar

Gear combination on request

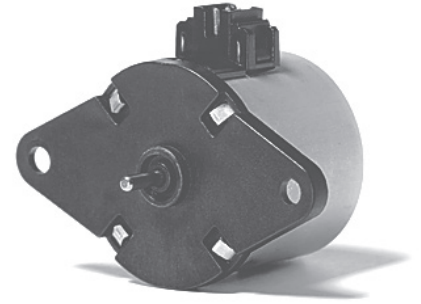

\* values for connector version (connection B or D) / values of lead wire version (connection N) are up to 20 % lower.

Note: All torque and power output values are minimum values, at rated voltage and motor temperature 23°C.

### Standard Data

Climatic class	wide-spread according to DIN IEC 60721-2-1 : 2015
Ambient temperature operation	°C -15 ... +60
Ambient temperature storage	°C -20 ... +100
Thermal resistance at f=0 R <sub>therm</sub>	29 K/W
Thermal class	130 (B) according to DIN EN 60085 : 2008
Approval	standard
Mounting	any position
Electrical connection	connector type D or N
Protection	IP30 according to DIN EN 60529 : 2014
Weight	54 g
Rotor stalling	motor can be stopped when voltage is applied, without being overheated
Bearings	Sintered bronze, self-lubricating

### Order Reference

Type	Stepper Motor	UCB	1	0	N	18	R	B
Configuration	1	bipolar, standard magnet	7	bipolar, stronger magnet				
	2	unipolar, standard magnet	8	unipolar, stronger magnet				
Rotor shaft, mounting	3	centring 8 mm, shaft 2.0 mm, screw plate	E	centring 10 mm, shaft 2.0 mm, screw plate				
	4	centring 8 mm, shaft 1.5 mm, screw plate	K	centring 10 mm, shaft 1.5 mm, screw plate				
	0	centring 8 mm, shaft 2.0 mm, clip	A	centring 10 mm, shaft 2.0 mm, clip				
	1	centring 8 mm, shaft 1.5 mm, clip	C	centring 10 mm, shaft 1.5 mm, clip				
Approval	N	Approval Standard						
Resistance		see next pages; Resistance per winding for bipolar or unipolar						
Direction	R	reversible						
Connection	D	see next pages "Connection Types" and page 145 "Connection Types" for B						
	N							




All specifications are representative only and maybe subject to variation. For confirmation of values, please contact Johnson Electric. Please also read "Saia Motors Important Notes" on catalog or at [www.johnsonelectric.com/SaiaMotorsNotes](http://www.johnsonelectric.com/SaiaMotorsNotes)

## Technical Data


bipolar	Configuration		UCB1	UCB7	
	Holding torque $M_H^*$	cNm	1.5	2.4	
	Detent torque $M_S$	cNm	0.17	0.38	
	Rotor inertia $J_R$	gcm <sup>2</sup>	2.1	2.4	
	Steps per revolution		24		
	Direction of rotation	V	reversible		
<b>Specific Technical Data Lead Wire Versions (Connection type N)</b>					
	Rated voltage $U_N$	V	6	12	24
	Duty cycle	%	100	100	100
	Resistance $R_{20}$	$\Omega$	24	90	380
	Winding code		18	03	04
<b>Specific Technical Data Connector Versions</b>					
	Rated voltage $U_N$	V	6	12	24
	Duty cycle	%	100	100	100
	Resistance $R_{20}$	$\Omega$	24	90	380
	Winding code		07	01	02
unipolar	Configuration		UCB2	UCB8	
	Holding torque $M_H^*$	cNm	1.1	1.8	
	Detent torque $M_S$	cNm	0.17	0.38	
	Rotor inertia $J_R$	gcm <sup>2</sup>	2.1	2.4	
	Steps per revolution		24		
	Direction of rotation	V	reversible		
<b>Specific Technical Data Lead Wire Versions</b>					
	Rated voltage $U_N$	V	12	24	6
	Duty cycle	%	100	100	100
	Resistance $R_{20}$	$\Omega$	90	380	24
	Winding code		10	11	12
<b>Specific Technical Data Connector Versions</b>					
	Rated voltage $U_N$	V	12	24	
	Duty cycle	%	100	100	
	Resistance $R_{20}$	$\Omega$	90	380	
	Winding code		01	02	

\* values of connector version (connection B or D) / values of lead wire version are up to 20 % lower


Circuit diagram bipolar

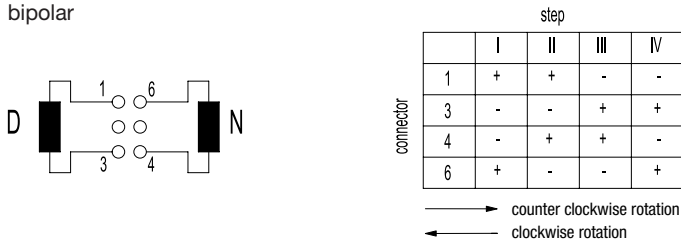


unipolar

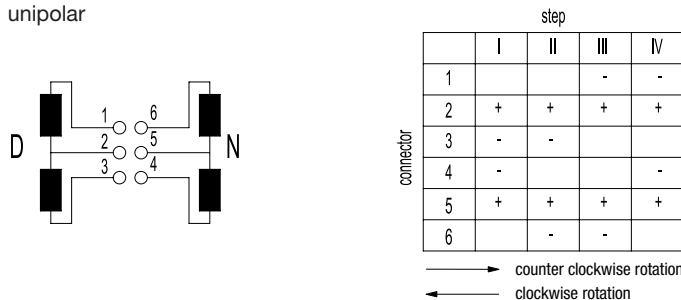









Dimensions Version with Connector D

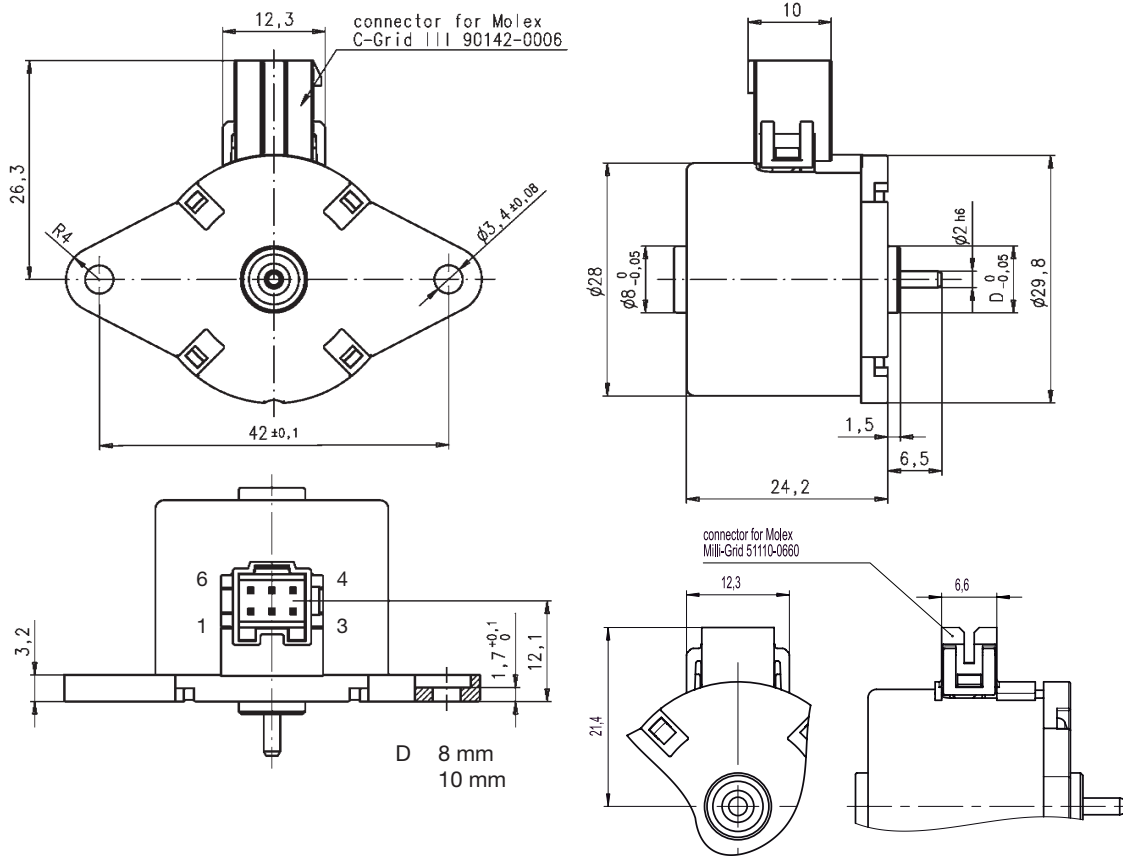

Version with Connector N (Lead wire version)

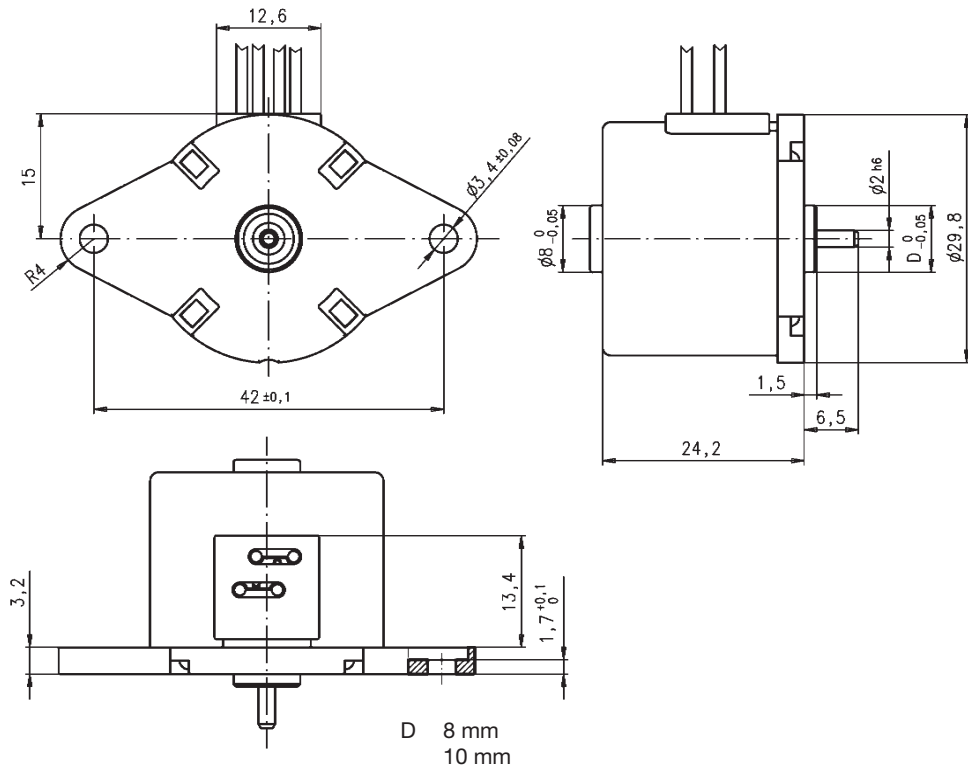

## Performance Chart

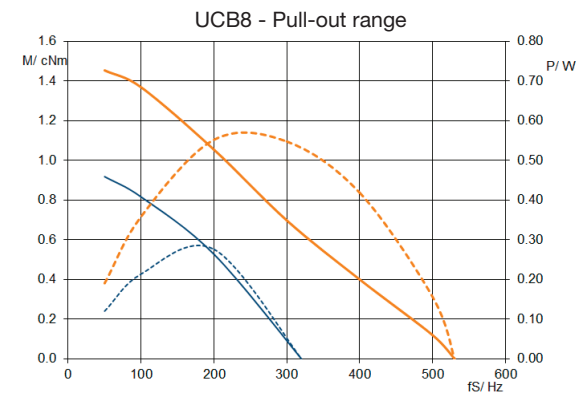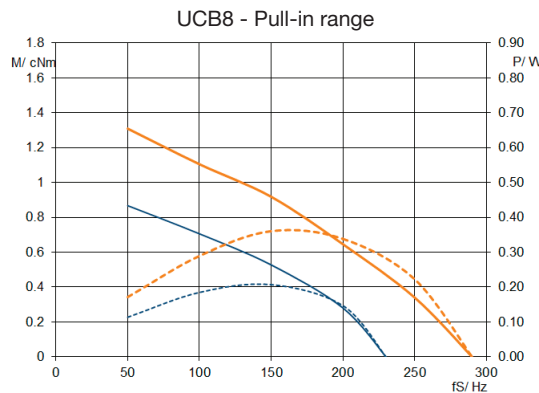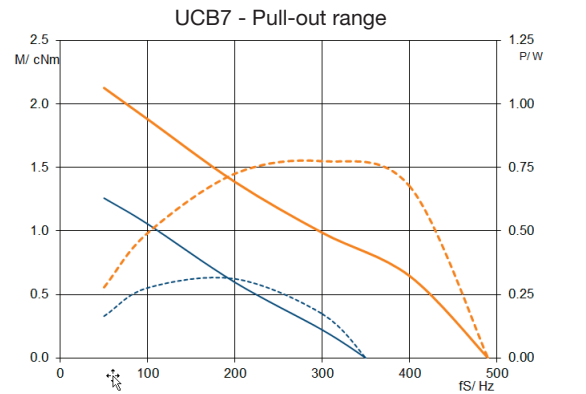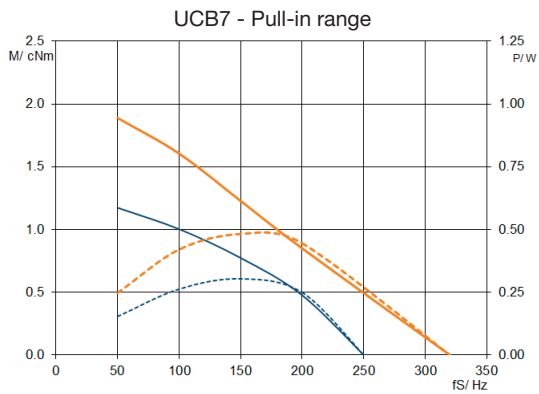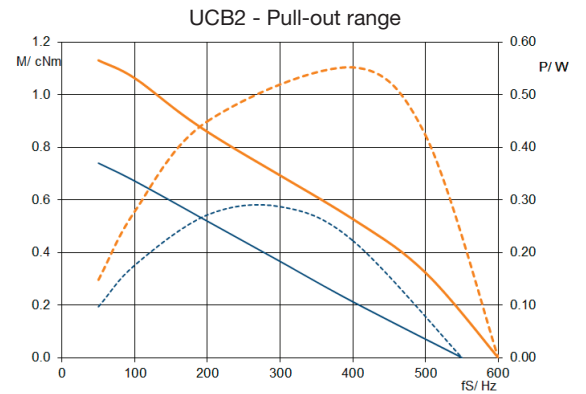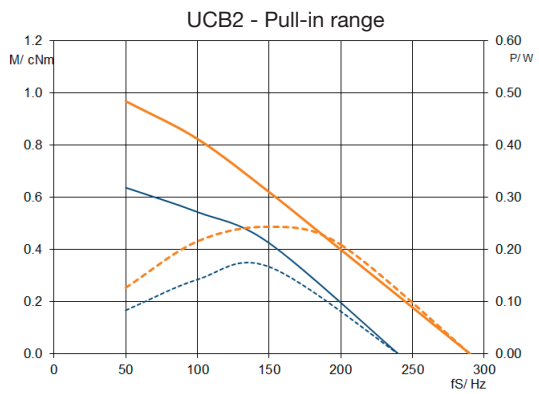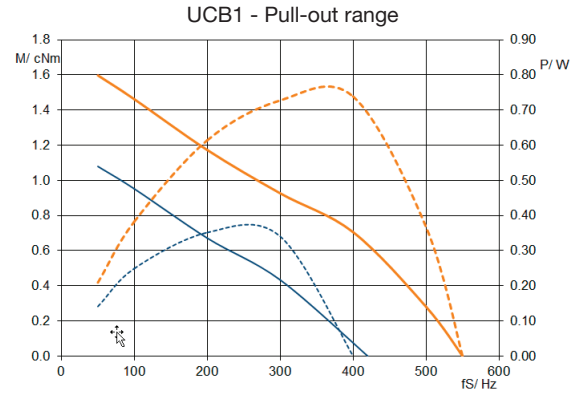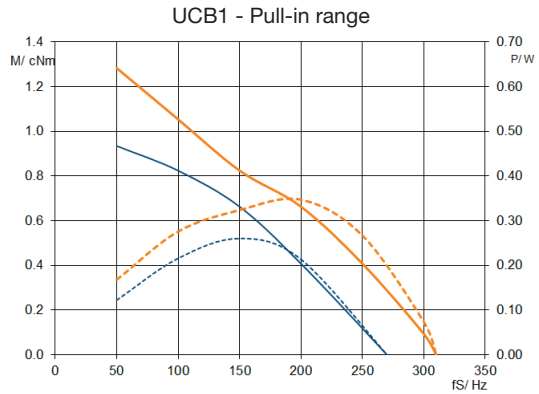

— M - Duty cycle 30 %  
— M - Duty cycle 100%

- - - P - Duty cycle 30 %  
- - - P - Duty cycle 100%