


Characteristics:

High Power Density

Specifications:

Dimensions	: Ø 2.9 X 3.4 in
Shaft Diameter	: Ø 0.315 in
Input Voltage	: 120.0 V AC , 60
Maximum Efficiency	: 69 %
Torque at Maximum Efficiency	: 2.14 lb.in
Speed at Maximum Efficiency	: 9831 rpm
Weight	: 32 oz
Operation Temperature	: 14 131 °F
Storage Temperature	: -4 176 °F
Electrical Connection	: Leadwire
Certification	: UL, RoHS

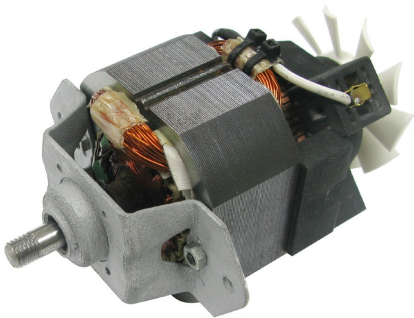


Performance Data:

	No Load	Typical Loading	Max Efficiency
Current (A)	1.50	2.90	3.09
Efficiency (%)	-	66	79
Speed (rpm)	20800	10325	9831
Torque (lb.in)	-	1.77	2.14


Application Examples:

Food Processors, Table Blenders, Kitchen Blenders, Centrifugal Juicers, Hand Mixers, Stand Mixers

Drawing:

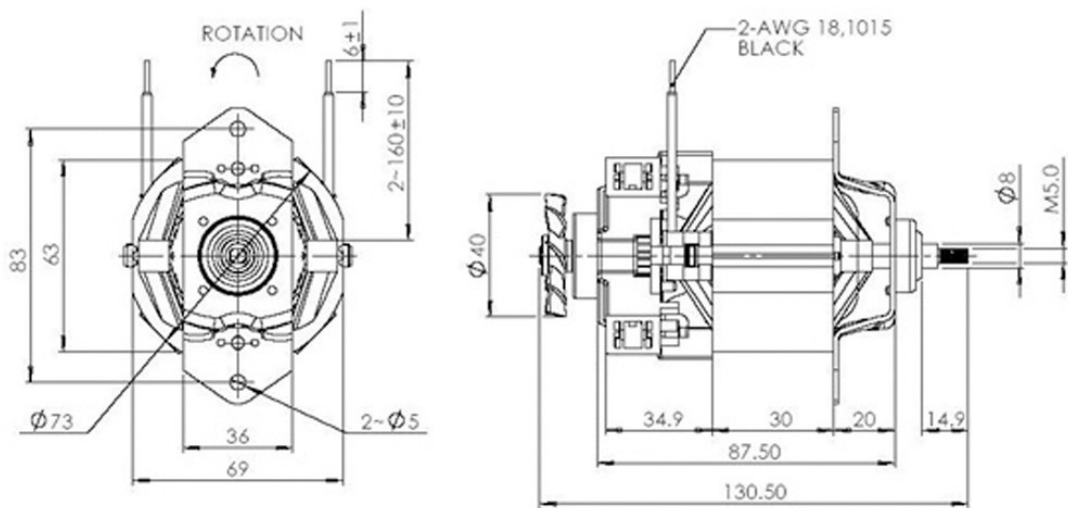

Performance Curves:

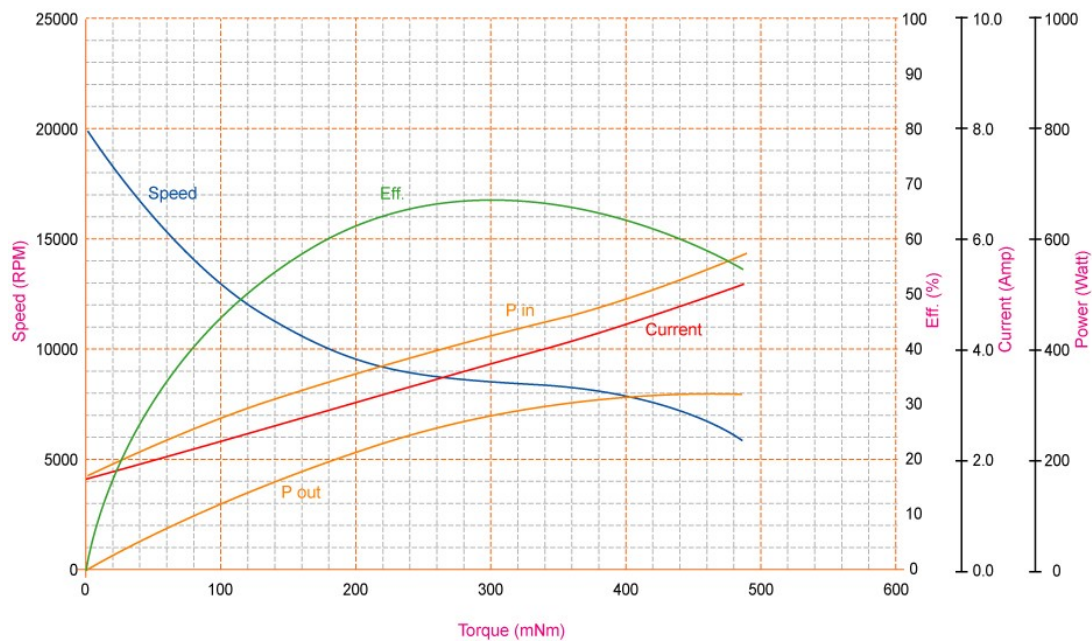

Units in Metric