


Characteristics:

High Power Density

Specifications:

Dimensions	: Ø 73.0 X 87.5 mm
Shaft Diameter	: Ø 8.000 mm
Input Voltage	: 120.0 V AC , 60 Hz
Maximum Efficiency	: 69 %
Torque at Maximum Efficiency	: 242.00 mNm
Speed at Maximum Efficiency	: 9831 rpm
Weight	: 910 g
Operation Temperature	: -10 to 55 °C
Storage Temperature	: -20 to 80 °C
Electrical Connection	: Leadwire
Certification	: UL, RoHS

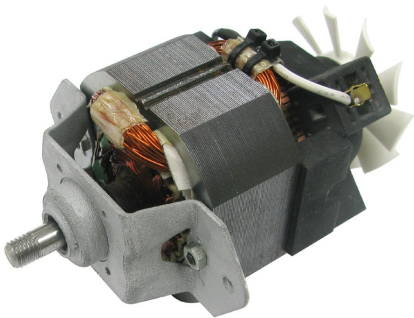

Performance Data:

	No Load	Typical Loading	Max Efficiency
Current (A)	1.50	2.90	3.09
Efficiency (%)	-	66	79
Speed (rpm)	20800	10325	9831
Torque (mNm)	-	200.00	242.00

Application Examples:

Food Processors, Table Blenders, Kitchen Blenders, Centrifugal Juicers, Hand Mixers, Stand Mixers

