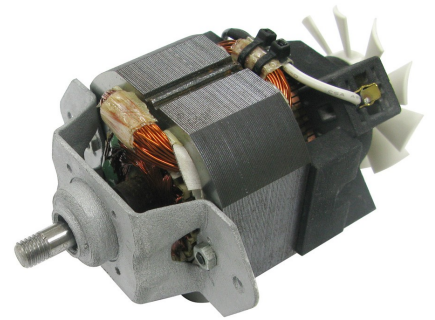


Characteristics:

High Power Density

Specifications:

Shaft Diameter	: Ø 8.000 mm
Input Voltage	: 230.0 V AC
Maximum Output Power	: 400.00 W
Maximum Efficiency	: 71 %
Torque at Maximum Efficiency	: 315.00 mNm
Speed at Maximum Efficiency	: 10365 rpm
Output Power at Maximum Efficiency	: 321 W
Life (typical)	: 120 hr
Weight	: 910 g
Operation Temperature	: -10 to 55 °C
Storage Temperature	: -20 to 80 °C
Electrical Connection	: Lead Wire
Certification	: RoHS


**Performance Data:**

	No Load	Typical Loading	Max Efficiency
Current (A)	0.67	1.71	2.03
Efficiency (%)	-	70	71
Output Power (W)	-	272.30	321.30
Speed (rpm)	29365	10922	10365
Torque (mNm)	-	250.00	315.00


Application Examples:

Food Processors, Juicers, Table Blenders, Kitchen Blenders, Centrifugal Juicers, Hand Mixers, Stand Mixers

Drawing:

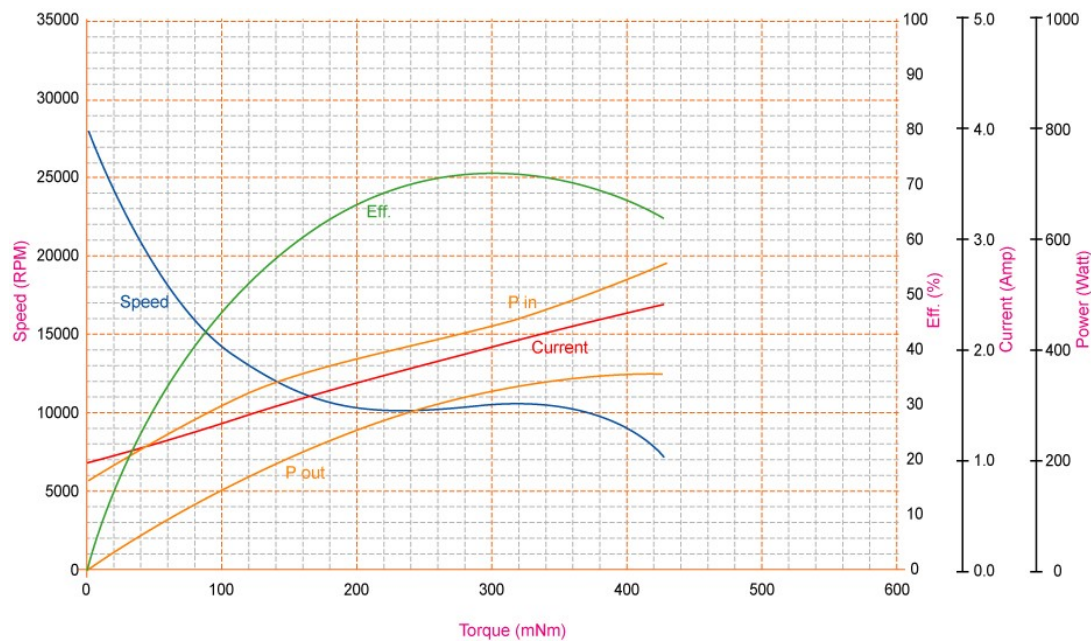

Performance Curves:

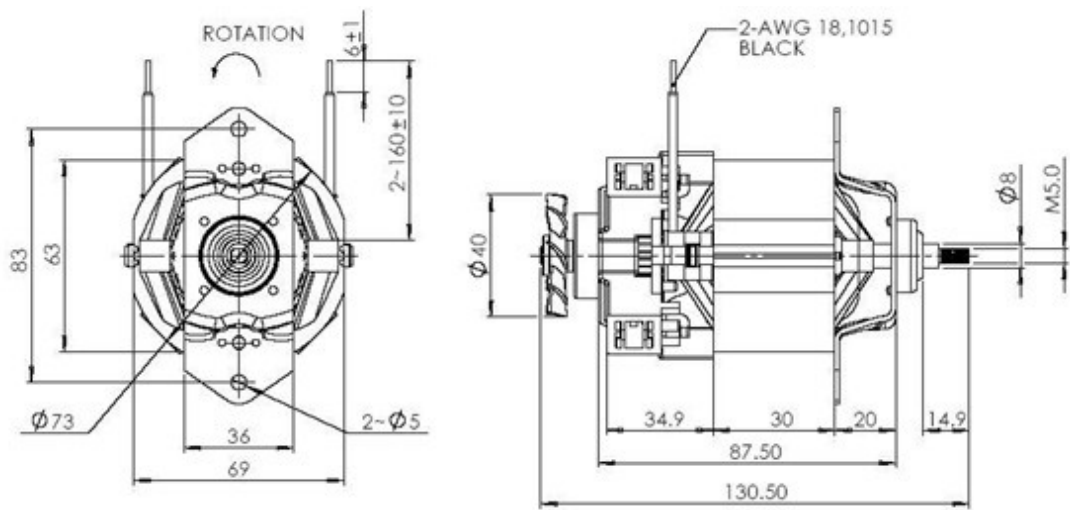

Units in Metric