

Specifications:

Dimensions	: Ø 1.40945 X 4.56692 in
Input Voltage	: 12.0 V DC
No Load Speed	: 4706 rpm
Stall Torque	: 1.96 lb.in
Maximum Output Power	: 0.04
Maximum Efficiency	: 71%
Operating Temperature Range	: -40 to 185 °F
Storage Temperature Range	: -40 to 185 °F
Electrcial Connection	: Male Terminal




Performance Data:

	No Load	Stall	Maximum Efficiency	Maximum Power
Current (A)	0.22	9.71	1.48	4.96
Efficiency (%)	-	-	71	-
Output Power (hp)	-	-	0.02	0.04
Speed (rpm)	4706	-	4085	2353
Torque (Lb.in)	-	1.96	0.26	0.98


Application Examples:

Latching / Cinching

Outline Drawing:

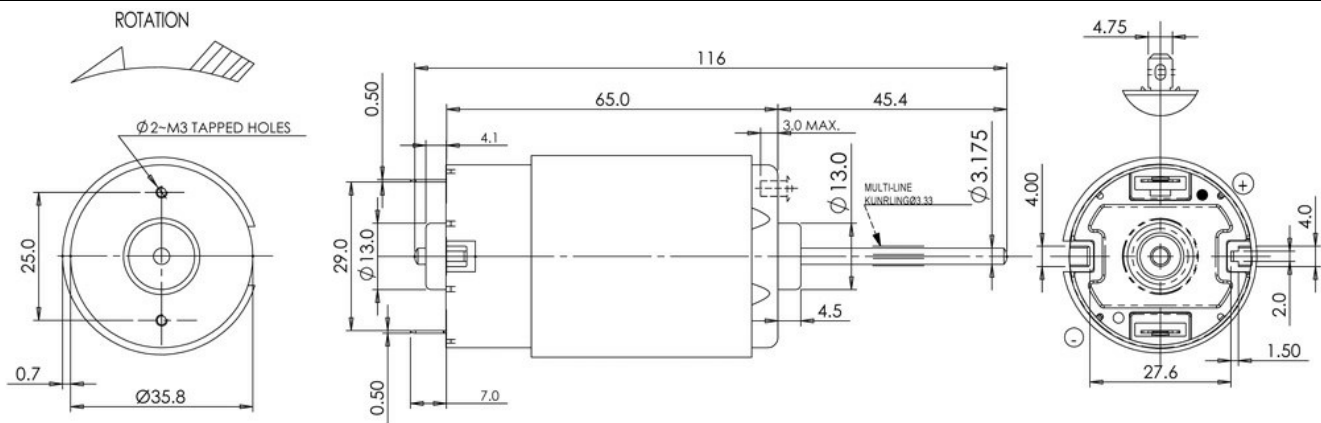

Performance Curves:

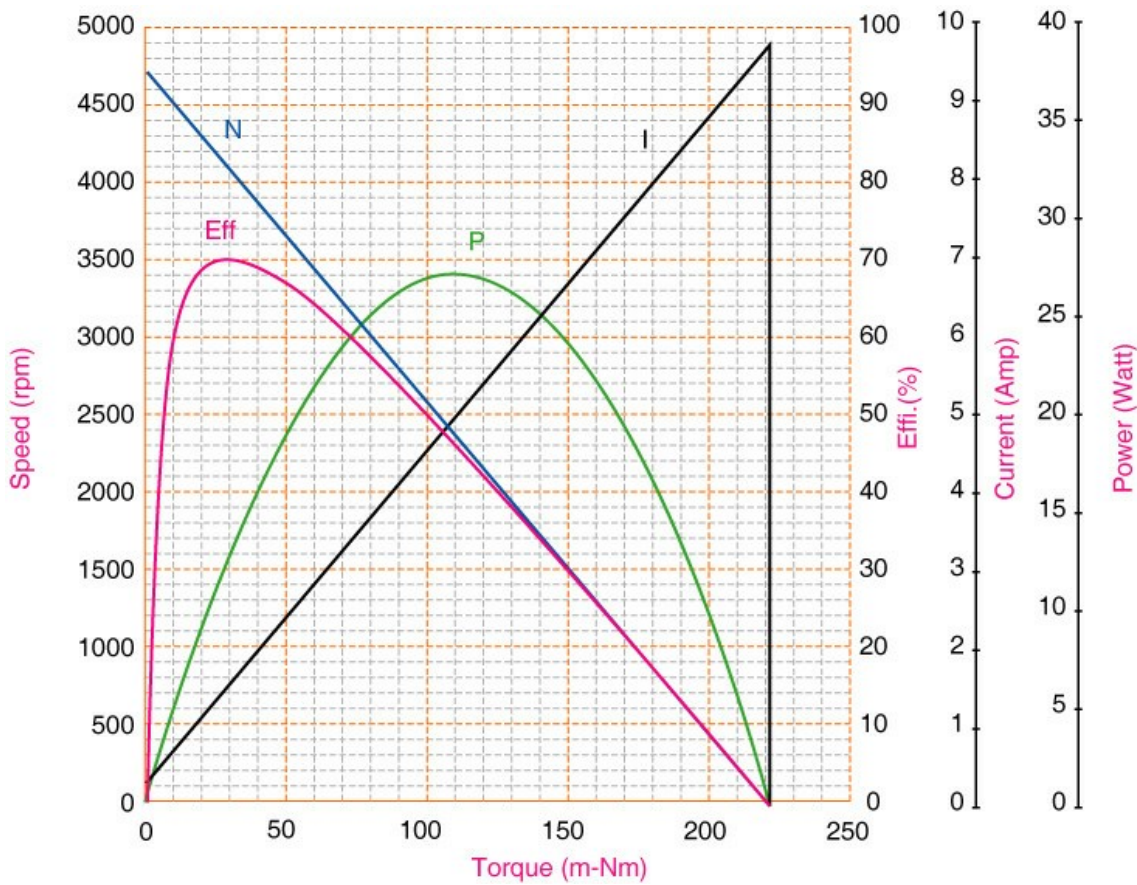

Units in Metric