

Specifications:

Dimensions	: Ø 35.8 X 116.0 mm
Input Voltage	: 12.0 V DC
No Load Speed	: 4706 rpm
Stall Torque	: 221.35 mNm
Maximum Output Power	: 27.28 W
Maximum Efficiency	: 71%
Operating Temperature Range	: -40 to 85 °C
Storage Temperature Range	: -40 to 85 °C
Electrcial Connection	: Male Terminal




Performance Data:

	No Load	Stall	Maximum Efficiency	Maximum Power
Current (A)	0.22	9.71	1.48	4.96
Efficiency (%)	-	-	71	-
Output Power (W)	-	-	12.50	27.28
Speed (rpm)	4706	-	4085	2353
Torque (mNm)	-	221.35	29.21	110.68


Application Examples:

Latching / Cinching

Outline Drawing:

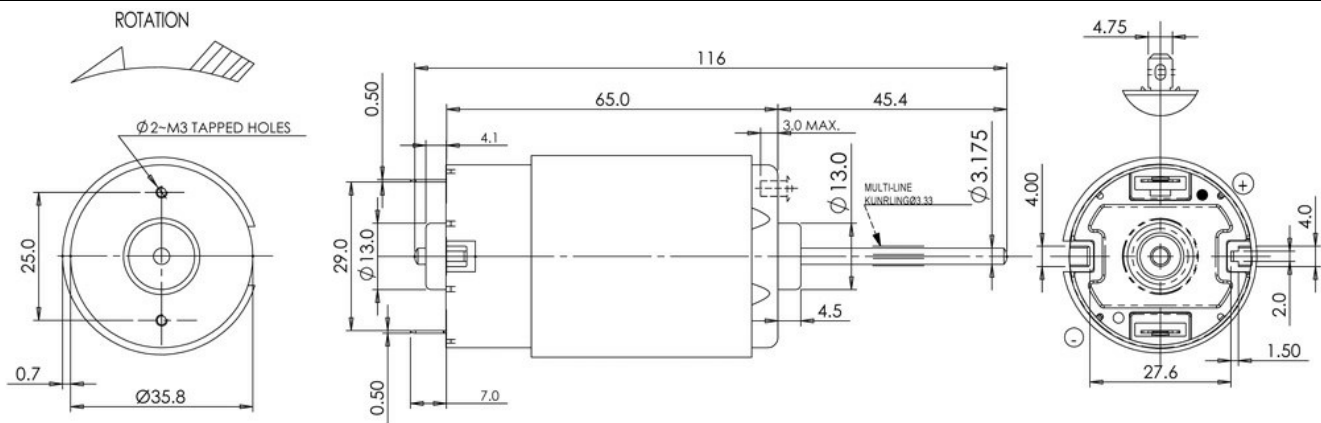

Performance Curves:

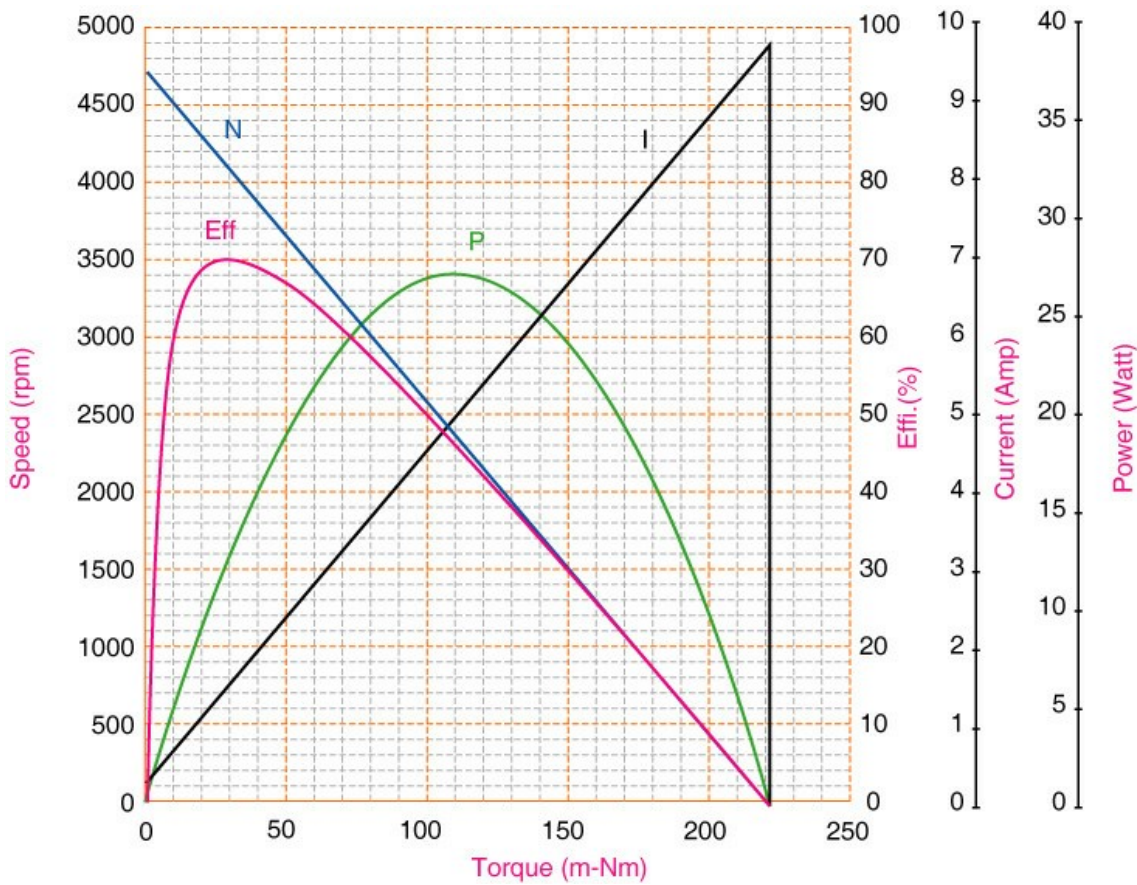

Units in Metric